


EAGLE GROUP

A Division of AIMCO

POWER TOOL SOLUTIONS

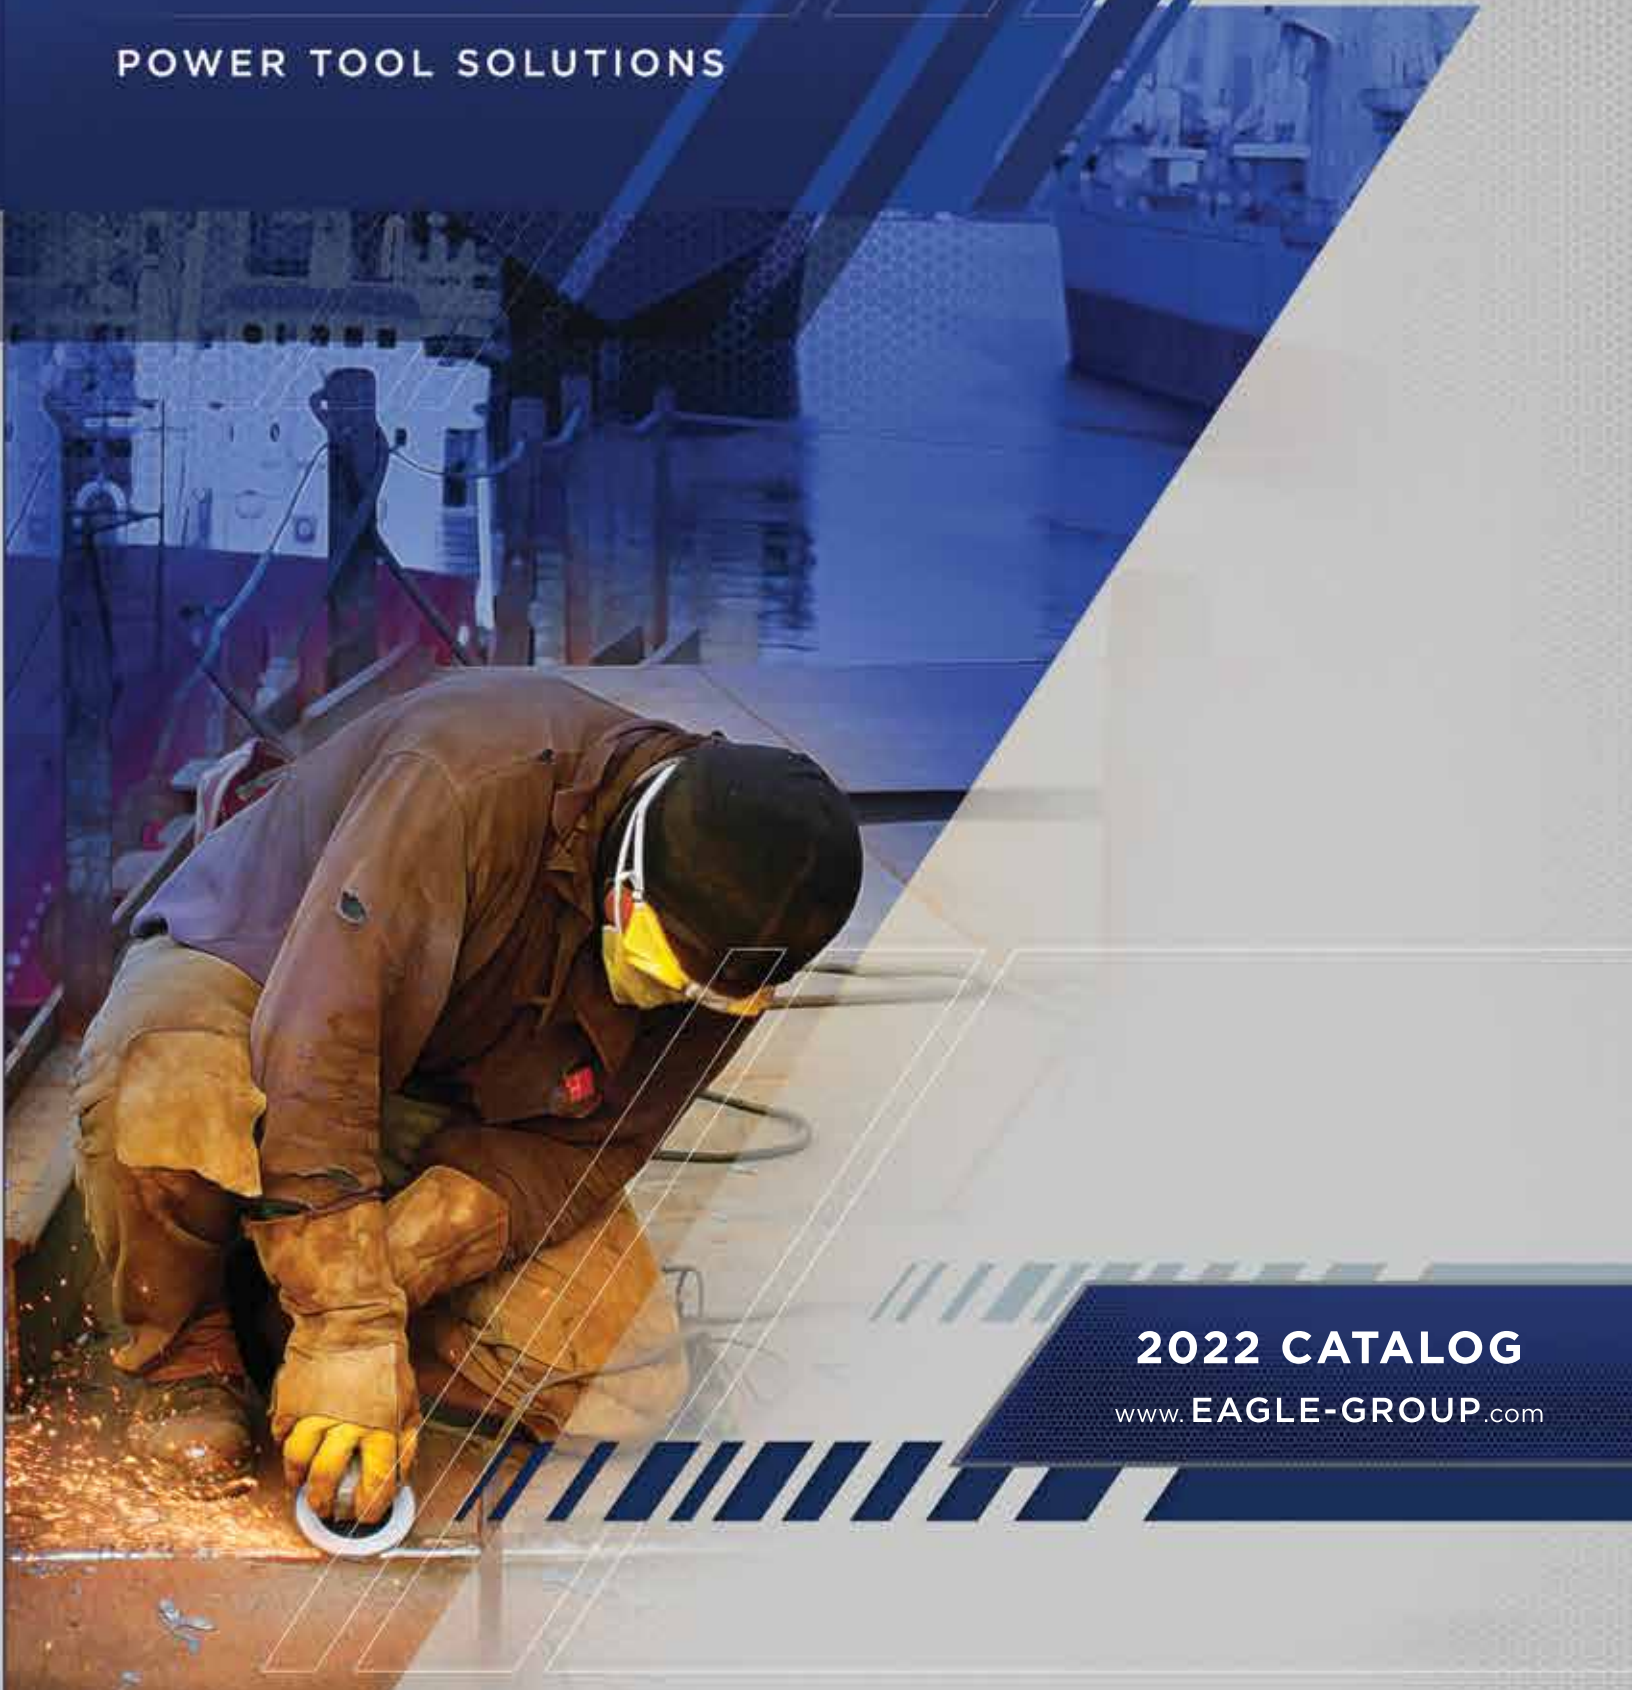

2022 CATALOG

www.EAGLE-GROUP.com



5	GRINDERS
13	SANDERS
17	IMPACT WRENCHES
23	RATCHET WRENCHES
25	PULSE TOOLS
27	ASSEMBLY TOOLS
35	DRILLS
39	PERCUSSION TOOLS
43	CUTTING & SPECIALTY TOOLS
47	ACCESSORIES
67	RESOURCES



>> ABOUT EAGLE GROUP

Eagle Group is a leading supplier of power tools for industrial markets. Whether you need tools for material removal, finishing, maintenance, automotive, or assembly, Eagle Group has your solution.

Eagle Group has been a supplier of power tools for over 30 years throughout the United States, Mexico, and South America.

Located in Portland, Oregon, Eagle resides in AIMCO's corporate complex.



EAGLE GROUP THE EAGLE GROUP **DIFFERENCE**

EAGLE GROUP

A portfolio designed for a variety of customers and customer use requirements

- Economic tool series for limited use, limited maintenance, or limited budget
- Ergonomic series for safer and more comfortable use
- Industrial and Premier series for specific process and safety improvements
- All supported under the AIMCO umbrella of service and support

CALL TODAY TOLL FREE:
(800) 852-1368

MATERIAL REMOVAL

5040
Vertical
Grinder



5205-2EC
Angle Grinder



5002C
Die Grinder



5I-10202X Extended Die Grinder



5000 Pencil Grinder



5I-06251 Heavy Duty Steel Grinder

BOLTING

High Torque Pneumatic

AAP1B Series



AAP2B
High-Speed Series



DynaTorque
Manual Torque
Multipliers ATM-3800



CUTTING



6080 Reciprocating Saw



6050
Reciprocating Saw

5G-10125
5" Angle Saw



IMPACT WRENCHES

2010
3/8"
Single Hammer



2225
1/2" Twin Hammer



2263EC
1/2" Twin Hammer



2004
3/4" Single Hammer



2450 1" Twin Hammer



2S-290015
1-1/2" Swing Hammer

LIGHT ASSEMBLY

EPTS Series
Pneumatic Screwdrivers



1115 Positive Clutch
Screwdriver



1577 Impact
Screwdriver

CORDLESS ASSEMBLY

Signature Series Cordless



SPC Series
Precision
Clutch



SIW Series
Shut-off Impact

FINISHING

6906EC Orbital
Sander



6134EC
Angle Sander



6116 Belt Sander



PERCUSSION

4009 Chipping Hammer



4260 Air Hammer



4005 Needle
Scaler



4004 Flux Chipper

DRILLING/TAPPING

738P-3200 Drill



7650 Angle Drill



7110 Reversible Drill



PULSE TOOLS

Screwdrivers



9020D
1/4"



9025
3/8"

GRINDERS

GRINDERS

*From precise pencil
grinders and die grinders
to large vertical grinders,*

Eagle Group has the right tool for your application. With a wide variety of horsepower ratings, RPMs, guards, and collet sizes, Eagle Group grinders excel in many applications, including blending, smoothing, cleaning, weld preparation, and deburring in maintenance, fabrication, and construction markets.

STRAIGHT DIE GRINDERS

>> GRINDERS

5I-03302

1/4" Steel Die Grinders

INDUSTRIAL DUTY



0.3 HP

5I-03302F



FRONT EXHAUST

0.3 HP

- Lightweight design with smooth performance
- Erickson collet precisely grips attachments resulting in minimal runout
- Safety lockout throttle lever prevents accidental start

5000

1/8" Pencil Grinder

GENERAL DUTY

- Excellent for blending/finishing work
- High-speed precision
- Complete with air hose, exhaust hose, and integral silencer



0.1 HP


5000

Application	General
Housing	Aluminum
Collet Size	1/8"
Approx. Power (hp)	0.1
Approx. Speed (rpm)	54,000
Throttle Type	Twist
Exhaust	Rear hose
Weight	0.6 lb / 0.3 kg
Length	5.3" / 133 mm
Air Usage (cfm)	6
Air Inlet	1/4"

5001

1/4" Steel Die Grinder

GENERAL DUTY

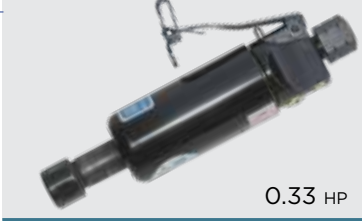

0.33 HP

- All steel housing
- Built-in regulator
- 1/8" collet available

5110

1/4" Aluminum Mini Die Grinder

GENERAL DUTY



0.38 HP

- Good for light weld grinding, polishing, and breaking sharp edges
- Air regulator allows operator to control speed

5002C

1/4" Aluminum Die Grinder

GENERAL DUTY



0.33 HP

- Compact and lightweight
- All ball-bearing construction
- Rib textured handle provides firm grip
- For blending, smoothing, and porting
- 1/8" collet available (part #32046-31-02)
- Alternative to MSI-Pro SM512

Model	Application	Housing	Collet Size	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
5I-03302	Industrial	Steel	1/4"	0.3	30,000	Lever	Rear	1	0.45	6.5	165	20	1/4"
5I-03302F	Industrial	Steel	1/4"	0.3	30,000	Lever	Front	1	0.45	6.5	165	20	1/4"
5001	General	Steel	1/4"	0.33	18,000	Lever	Front	1.3	0.6	6.5	165	14	1/4"
5002C	General	Aluminum	1/4"	0.33	22,000	Lever	Rear	1.2	0.5	6.9	175	14	1/4"
5110	General	Aluminum	1/4"	0.38	25,000	Lever	Rear	0.8	0.4	4.8	122	14	1/4"

5201EC 5200EC 1/4" Composite Die Grinders

GENERAL DUTY

Mini Grinder



0.5 HP



0.75 HP

- Lightweight and durable
- Ergonomic composite housing with a soft comfortable grip
- For blending, smoothing, and sanding
- Less noise, vibration, and thermal transfer than aluminum tools

5I-04252 5I-06222 1/4" Composite Die Grinders

INDUSTRIAL DUTY



0.4 HP



0.6 HP

- Lightweight design with smooth performance
- Erickson collet precisely grips attachments resulting in minimal runout
- Safety lockout throttle lever prevents accidental tool start

Model	Application	Housing	Collet Size	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
5201EC	General	Composite	1/4"	0.5	25,000	Lever	Rear	0.8	0.36	6.25	159	12	1/4"
5200EC	General	Composite	1/4"	0.75	22,000	Lever	Rear	1.3	0.59	6.75	171	14	1/4"
5I-04252	Industrial	Composite	1/4"	0.4	25,000	Lever	Rear	1	0.46	7	179	25	1/4"
5I-06222	Industrial	Composite	1/4"	0.6	22,000	Lever	Rear	1.58	0.72	7.8	198	30	1/4"

1/4" HEAVY-DUTY STEEL DIE GRINDERS

5I-06251

5I-10202

INDUSTRIAL DUTY

Compact



0.6 HP



1.0 HP

- Heavy-duty steel housing
- Erickson collet precisely grips attachments for long-lasting, minimal runout
- Safety lockout throttle lever prevents accidental tool start
- 5I-10202: Governed air motor for safe use and maximum power and speed under load

Model	Application	Housing	Collet Size	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
5I-06251	Industrial	Steel	1/4"	0.6	25,000	Lever	Front	1.45	0.66	6.5	165	19	1/4"
5I-10202	Industrial	Steel	1/4"	1.0	20,000	Lever	Front	2.82	1.28	7.9	201	35	3/8"

EXTENDED DIE GRINDERS

5206EC (3") / 5207EC (5") 1/4" Composite Die Grinders, 3" & 5" Extended

GENERAL DUTY



0.6 HP



0.6 HP

- Lightweight and durable
- Extended length for hard-to-reach areas
- Ergonomic composite housing with a soft comfortable grip
- For blending, smoothing, and porting
- Less noise, vibration, and thermal transfer than aluminum tools

1/4" COMPOSITE HEAVY-DUTY DIE GRINDERS, 5" EXTENDED

5I-04252X

5I-06202X

INDUSTRIAL DUTY



0.4 HP




0.6 HP

- Lightweight design with smooth performance
- Erickson collet precisely grips attachments resulting in minimal runout
- Safety lockout throttle lever prevents accidental start

5116 1/4" Aluminum Die Grinder, 6" Extended

GENERAL DUTY

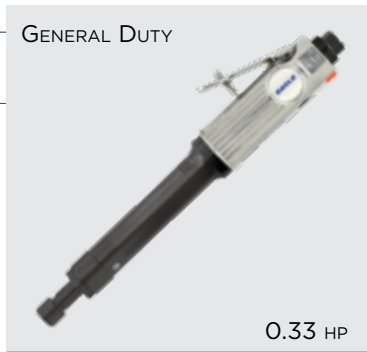

0.33 HP

- All ball-bearing construction
- Extended length for hard-to-reach areas
- Rib textured handle provides firm grip
- For blending, smoothing, and porting

5I-10202X 1/4" Steel Die Grinder, 6" Extended

INDUSTRIAL DUTY



1.0 HP

- 1/4" Erickson collet precisely grips attachments for long-lasting, minimal runout
- Robust safety lever and all-steel body construction
- Double bearing supported spindle
- Full 1 HP governed air motor for safe use and maximum power and speed under load

Model	Application	Housing	Extension	Collet Size	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
									lb	kg	in	mm		
5206EC	General	Composite	3"	1/4"	0.6	25,000	Lever	Rear	1.43	0.65	9.25	235	12	1/4"
5207EC	General	Composite	5"	1/4"	0.6	25,000	Lever	Rear	1.45	0.66	11.25	286	12	1/4"
5I-04252X	Industrial	Composite	5"	1/4"	0.4	25,000	Lever	Rear	1.4	3.08	12.2	309	25	1/4"
5I-06202X	Industrial	Composite	5"	1/4"	0.6	20,000	Lever	Rear	2.31	1.05	13.03	331	30	1/4"
5116	General	Aluminum	6"	1/4"	0.33	22,000	Lever	Rear	2.75	1.2	13.0	305	14	1/4"
5I-10202X	Industrial	Steel	6"	1/4"	1	20,000	Lever	Rear	4.5	2	14.5	368	35	3/8"

ANGLE DIE GRINDERS

5004C

1/4" Gearless Angle Die Grinder

- Lower vibration than standard right-angle die grinders
- No reduction in performance due to gear wear
- No gear replacement needed
- Cylinder constructed of high quality steel
- Variable speed throttle for positive speed control
- For general high-speed polishing and grinding
- Alternative to MSI-Pro SM524



5003C

1/4" Aluminum Angle Die Grinder

- Compact lightweight design
- Ball-bearing construction
- For sanding, deburring, and polishing
- Right angle provides easy access


GENERAL DUTY



5A-04122 / 5A-04202

1/4" Composite Angle Die Grinder

- Lightweight design with smooth performance
- Erickson collet precisely grips attachments resulting in minimal runout
- Safety lockout throttle lever prevents accidental start



5202EC

1/4" Composite Angle Die Grinder, 90°

GENERAL DUTY



5203EC

1/4" Composite Angle Die Grinder, 105°



- Lightweight and durable
- Ergonomic composite housing with a soft comfortable grip
- Less noise, vibration, and thermal transfer than aluminum tools
- Right angle provides easy access
- For sanding, polishing, deburring, and porting

Model	Application	Housing	Collet Size	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
5003C	General	Aluminum	1/4"	0.33	20,000	Lever	Rear	1.0	0.5	6.3	159	14	1/4"
5004C	General	Aluminum	1/4"	0.3	25,000	Lever	Rear	1.1	0.5	6.7	170	2.7	1/4"
5A-04122	Industrial	Composite	1/4"	0.4	12,000	Lever	Rear	1.3	0.59	7.2	182	20	1/4"
5A-04202	Industrial	Composite	1/4"	0.4	20,000	Lever	Rear	1.3	0.59	7.2	182	19	1/4"
5202EC 5203EC	General	Composite	1/4"	0.6	20,000	Lever	Rear	1.1	0.55	6.25	159	12	1/4"

ANGLE GRINDERS

5A-0514-2

2" Steel Angle Grinder

- Robust, steel design for harsh use environments
- 2" angle head designed for limited access and ease of maneuverability
- Adjustable guard rotation for best protection



5205-2EC

3" Composite Angle Grinder, 105°

- Ergonomic and safe use design
- 105° angled head design provides improved sight lines and spark angle
- Tight access use
- 1/16" to 1/4" wheel capability



5006 (4") / 5007 (5")

4" & 5" Aluminum Angle Grinders

- Governed motor
- 5/8"-11 adapter included
- Uses Type 27 wheels, abrasive discs
- Spiral bevel gearing for extended life, low vibration
- For weld prep, smoothing, rust removal, and deburring
- Lightweight aluminum alloy housing



5194EC / 5194EC-KIT 4"

5195EC / 5195EC-KIT (4.5")

5196EC / 5196EC-KIT (5")

Composite Angle Grinders

- Swivel guard adjustable in nine steps
- Composite body, spindle lock, rear exhaust, quiet operation
- Reversible side handle
- Governed motor
- KIT models include an Ergo Handle and a Quick Nut



	5194EC	5195EC	5196EC
Application	Industrial		
Wheel Capacity	4"	4.5"	5"
Housing	Composite		
Spindle	3/8"-24	5/8"-11	5/8"-11
Approx. Power (hp)	1.3		
Approx. Speed (rpm)	12,000		
Throttle Type	Lever		
Exhaust	Rear		
Weight	3.8 lb / 1.72 kg		
Length	9.6" / 244 mm		
Air Usage (cfm)	25		
Air Inlet	1/4"		

ACCESSORIES

8101

Ergo Handle

- Dramatically reduces vibration
- For models 5194EC, 5195EC, and 5196EC



8102 / 8103

Quick Nut

- Eliminates spanner wrench
- #8102 for 5/8"-11 spindle (5195EC & 5196EC)
- #8103 for 3/8"-24 spindle (5194EC)



Model	Application	Housing	Wheel Capacity	Spindle	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
									lb	kg	in	mm		
5A-0514-2	Industrial	Steel	2"	3/8"-24	0.5	14,000	Lever	Side	3	1.4	8.5	216	15	1/4"
5205-2EC	General	Composite	3"	3/8" shaft	0.6	15,000	Lever	Rear	1.5	0.68	8.25	210	12	1/4"
5006	General	Aluminum	4"	3/8"-24*	0.6	11,000	Lever	Front right	4	1.8	9.5	241	18	1/4"
5007	General	Aluminum	5"	3/8"-24*	0.6	11,000	Lever	Front right	4.3	1.8	9.5	241	18	1/4"

* 5/8"-11 adapter included

ANGLE GRINDERS



5104 (4") / 5105 (5") 4" & 5" Sandcast Aluminum Angle Grinders

- All steel internal parts
- Four-step heat treat process
- Sandcast aluminum housing
- Uses Type 27 wheels and abrasive discs

5A-1012-5 5" Aluminum Angle Grinder



- Low profile angle head and sleek design for comfort and maneuverability
- Sandcast head and steel collar for robust construction and heavy use
- Machined aluminum body for light weight and durability
- Deep cut bevel gears for long-lasting transmission of power and lower vibration
- Left/right hand use
- Governed motor for constant speed
- Safety start lever
- Rear exhaust

5008H 7" Aluminum Angle Grinder



- Governed motor
- Aluminum alloy housing
- Spiral bevel gear angle head for long tool life
- For cleaning, deburring, notching, and grinding

5A-1676-7 7" Sandcast Aluminum Angle Grinder



- All steel internal parts
- Four-step heat treat process
- Sandcast aluminum housing
- Uses Type 27 wheels and abrasive discs

Model	Application	Housing	Wheel Capacity	Spindle	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
									lb	kg	in	mm		
5104	Industrial	Sandcast aluminum	4"	3/8"-24	1	13,500	Pushbutton/lever	Front right	4.4	2	8.3	211	34	1/4"
5105	Industrial	Sandcast aluminum	5"	5/8"-11	1	10,800	Pushbutton/lever	Front right	4.4	2	8.3	211	34	1/4"
5A-1012-5	Industrial	Aluminum	5"	5/8"-11	1	12,000	Lever	Rear	4.0	1.8	11	279	30	3/8"
5008H	General	Aluminum	7"	5/8"-11	1.1	7,000	Pushbutton/lever	Bottom	7.0	3.2	13.5	343	34	3/4"
5A-1676-7	Industrial	Sandcast aluminum	7"	5/8"-11	1.6	7,600	Lever	Front right	6.6	3	11.8	300	56	3/8"

VERTICAL GRINDERS

5040-6 (6") / 5040 (7") / 5040-9 (9")
 6" / 7" / 9" Aluminum Vertical Grinders

INDUSTRIAL DUTY



5040 / 5040-9

- 3 HP governed motor
- Durable aluminum housing
- Safety throttle

	5040-6	5040	5040-9
Application	Industrial		
Housing	Aluminum		
Wheel Capacity	6"	7"	9"
Spindle	5/8"-11		
Approx. Power (hp)	3.0		
Approx. Speed (rpm)	6,000		
Throttle Type	Pushbutton / lever		
Exhaust	Side/directional		
Weight	7.7 lb / 3.5 kg		
Length	12" / 305 mm		
Air Usage (cfm)	49		
Air Inlet	1/2"		

5040-7G
7" GUARD



5040-6CG
6" CUP GUARD



5040-9G
9" GUARD



SANDERS SANDERS



*A perfect mix
of dependability,
features, and value,*

Eagle Group sanders and
polishers are ideal for a wide
range of finishing and refinishing
applications, including auto paint &
body shops, wood working shops,
fiberglass finishers, and general industry.

ANGLE SANDERS & POLISHER

2" COMPOSITE SERIES ANGLE SANDERS

- Lightweight and durable
- Ergonomic composite housing with a soft comfortable grip
- Less noise, vibration, and thermal transfer than aluminum tools

6133EC Angle Sander, 90°

GENERAL DUTY



15,000 RPM

6134EC Angle Sander, 105°

GENERAL DUTY



6115EC Angle Orbital Sander, 105°

GENERAL DUTY



15,000 RPM

- Pad Size: 2" Diameter, M6 x 1.0 thread, yellow polyurethane foam pad, hooked Velcro face
- Orbital Capacity: 0.2" / 3.0 mm

- 6133EC and 6134EC with roll lock abrasive holder

Model	Application	Housing	Sanding Disc	Pad Size	Spindle	Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
6133EC	General	Composite	2"	1.75"	1/4"-20	0.25	15,000	1.05	0.48	6.75	171	12	1/4"
6134EC	General	Composite	2"	1.75"	1/4"-20	0.25	15,000	1.05	0.48	6.75	171	12	1/4"
6115EC	General	Composite	2"	2"	1/4"-20	0.3	15,000	1.36	0.62	6.75	171	12	1/4"

6012 7" Aluminum Angle Sander

- Powerful 1 hp motor
- Dead handle mounts either side
- Hardened and ground spiral bevel gears for long life
- For heavy rust removal, sanding, and shaping of filler patches

GENERAL DUTY



4,500 RPM

6507 7" Aluminum Angle Polisher

- Built-in power regulator
- Dead handle for easy control
- Ideal for buffing and polishing paint and metal to a professional finish

GENERAL DUTY



2,500 RPM

Model	Application	Housing	Sanding Disc	Pad Size	Spindle	Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
6012	General	Aluminum	7"	7"	5/8"-11	1	4,500	6	2.7	15	381	19	1/4"
6507	General	Aluminum	7"	7"	5/8"-11	0.25	2,500	6.5	2.9	18	457	12	1/4"

ORBITAL & JITTERBUG SANDERS

6905EC (5") / 6906EC (6")

5" & 6" Composite Random Orbital Sanders

INDUSTRIAL DUTY



12,000 RPM

- Vibration absorbing grip
- High power and lightweight
- PSA pad type
- Orbital action assures swirl-free finish
- For touch-up, feather-edging, sanding, pre-paint preparation

	6905EC	6906EC
Application	Industrial	
Housing	Composite	
Pad Size	5"	6"
Spindle	5/16"-24	
Orbit	3/16" pattern	
Approx. Power (hp)	0.25	
Approx. Speed (rpm)	12,000	
Weight	2 lb / 0.9 kg	
Length	6.9" / 175 mm	
Air Usage (cfm)	15	
Air Inlet	1/4"	

6005

6" Aluminum Dual-Action Orbital Sander

- Dual action
- Built-in regulator
- Insulated grip
- Lightweight all aluminum body construction
- For touch-up, feather-edging, sanding, and pre-paint preparation

GENERAL DUTY



10,000 RPM

6009

Jitterbug Sander

- Durable construction
- For wet and dry sanding
- For wood, metal, or plastic finishing and fiberglass

GENERAL DUTY



8,000 RPM

Model	Application	Housing	Pad Size	Spindle	Orbit	Approx. Power (hp)	Approx. Speed (rpm)	Weight lb	kg	Length in	mm	Air Usage (cfm)	Air Inlet
6005	General	Aluminum	6"	5/16"-24	5/16" pattern	0.25	10,000	5.2	2.1	12	305	16	1/4"
6009	General	Aluminum	3.5 x 7.75 in 89 x 197 mm	—	—	0.25	8,000	4.3	2	8	203	15	1/4"

HIGH-SPEED, BOARD, & BELT SANDERS

6113 3" - 5" High-Speed Sander

- Lightweight, compact design
- Includes 3" & 5" backing pads
- Built-in regulator to control speed
- For paint removal, shaping filler patches, weld smoothing, rust removal

GENERAL DUTY



18,000 RPM

6017 Two-Piston Board Sander

- Two handle design
- Smooth feathers; dual pistons provide efficient power and prevent stalling
- For all types of surface preparation and rapid removal of material from large areas

GENERAL DUTY



3,300 RPM

Model	Application	Housing	Pad Size	Spindle	Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
							lb	kg	in	mm		
6113	General	Aluminum	3" / 5"	3/8"	0.25	18,000	2.4	1.1	4.6	117	19	1/4"
6017	General	Aluminum	2.5 x 15.75 in 63 x 400 mm	—	0.75	3,300	6.87	3	16	406	9	1/4"

ALUMINUM BELT SANDERS

- Best for sanding confined areas and curved surfaces
- Adjustable sanding belt rotates to allow easy handling
- Quick-change belt replacement

Model	Application	Housing	Belt Size		Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
			in	mm			lb	kg	in	mm		
6114	General	Aluminum	3/8 x 13	10 x 305	0.33	16,000	1.7	0.8	10.5	267	14	1/4"
6115	General	Aluminum	1/2 x 24	13 x 610	0.33	16,000	1.7	0.8	23.5	597	14	1/4"
6116	General	Aluminum	3/4 x 20.5	20 x 520	0.4	16,000	3.1	1.4	11.9	302	18	1/4"

6114

6115

6116

GENERAL DUTY



16,000 RPM



IMPACT WRENCHES IMPACT WRENCHES



From light-duty plant maintenance to heavy-duty industrial steel applications,


Eagle Group impact wrenches are available in single hammer, twin hammer, and pin clutch types.

IMPACT WRENCH CLUTCH INFORMATION

Eagle Group's Impact Wrenches are available with various clutch configurations. Choosing the correct clutch depends on application requirements such as weight, vibration, durability, ease of maintenance, torque, and power.



Single Hammer




The Single Hammer design is proven and cost effective. It delivers a high torque-to-weight ratio.



Uses

- Standard assembly
- Automotive repair
- Light industrial use

Twin Hammer




The Twin Hammer design provides a reliable system producing torque quickly with two forged hammers.



Uses

- Industrial maintenance
- Tire service

Pin Clutch




The Pin Clutch design provides rapid delivery of torque and high power-to-weight ratio.



Uses

- Maintenance
- Light assembly
- Hard joints

Swing Hammer



The Swing Hammer Clutch is a simple, effective design that provides rapid delivery of torque.



Uses

- Standard assembly applications
- Maintenance
- Hard joints

3/8" - 1/2" IMPACT WRENCHES

2010

3/8" Single Hammer Diecast Aluminum Impact Wrench

- Single hammer design
- Air inlet swivels 360° for easy maneuvering
- For bench work, carburetors, ignitions, body panels, transmissions, fender struts, oil pans, and small engine work
- Butterfly throttle allows one-hand directional changes



GENERAL DUTY



WORKING TORQUE: 260 FT-LB

2260L

1/2" Twin Pin Composite Impact Wrench

- Engineered for the after-market automotive industry
- Pin clutch design to quickly deliver torque
- 2-1/2" extended anvil

2263EC / 2263PEC

1/2" Twin Hammer Composite Impact Wrenches

INDUSTRIAL DUTY
2263EC



2263PEC



Pin Type Anvil

WORKING TORQUE: 295 FT-LB

- Twin hammer design
- Swivel air inlet fitting
- Large easy-to-use forward reverse switch
- Bottom grease fitting

EAGLE GROUP

A Division of AIMCO

Model	Application	Housing	Hammer	Drive Size	Approx. Speed (rpm)	Torque Range		Max Torque		Weight		Length		Air Usage (cfm)	Air Inlet
						ft-lb	Nm	ft-lb	Nm	lb	kg	in	mm		
3/8" Wrenches															
2010	General	Aluminum	Single	3/8"	10,000	11 - 75	15 - 102	92	125	2.8	1.3	6.4	163	13	1/4"
1/2" Wrenches															
2260L	General	Composite	Twin pin	1/2"	7,500	114 - 260	154 - 352	302	409	6.15	2.8	7.5	194	12	1/4"
2263EC 2263PEC	Industrial	Composite	Twin	1/2"	7,800	210 - 295	284 - 400	333	452	4.5	2	8.2	208	19	1/4"

1/2" - 3/4" IMPACT WRENCHES

2225

1/2" Twin Hammer Diecast Aluminum Impact Wrench

- Diecast aluminum housing for durability
- Twin hammer design
- Compact size for tight access
- Handle exit exhaust



2004

3/4" Single Hammer Diecast Aluminum Impact Wrench

- Single hammer design
- Built-in regulator
- Available with extended anvil



IMPACT WRENCHES >>

Model	Application	Housing	Hammer	Drive Size	Approx. Speed (rpm)	Torque Range		Max Torque		Weight		Length		Air Usage (cfm)	Air Inlet
						ft-lb	Nm	ft-lb	Nm	lb	kg	in	mm		
1/2" Wrenches															
2225	General	Diecast aluminum	Twin	1/2"	8,000	190 - 328	257 - 445	365	495	5.6	2.5	7.25	184	15	1/4"
3/4" Wrench															
2004	General	Diecast aluminum	Single	3/4"	5,000	145 - 500	196 - 746	600	815	10.5	4.8	9.5	241	28	3/8"



3/4" - 1" IMPACT WRENCHES

2P-155034

3/4" Twin Hammer Composite Impact Wrench

INDUSTRIAL DUTY



WORKING TORQUE: 1,000 FT-LB

2P-15501

1" Twin Hammer Composite Impact Wrench



WORKING TORQUE: 1,750 FT-LB

- Extremely lightweight with ergonomic handle configuration
- Proportional trigger for operator control
- Recessed torque output selector in CW direction: Low-Mid-High
- Reverse (CCW) always delivered with maximum power
- Swiveling 360° air inlet
- Reliable 7-vane air motor for consistent power delivery

2450 / 2450L

1" Twin Hammer Sandcast Aluminum Impact Wrenches

INDUSTRIAL DUTY

2450



2450L



WORKING TORQUE: 1,450 FT-LB

- Twin hammer design
- Smooth power in a compact, lightweight design
- 2450 with standard 3" anvil
- 2450L with 6" extended anvil

INDUSTRIAL DUTY

2453
2" Anvil



2463
6" Anvil

WORKING TORQUE: 1,300 FT-LB

2453 / 2463

1" Twin Hammer Steel Impact Wrenches

- Twin hammer design
- Steel clutch housing protects hammer mechanism
- For tire changing on trucks and buses
- 2453 includes 2" anvil
- 2463 includes 6" anvil

Model	Application	Housing	Hammer	Drive Size	Approx. Speed (rpm)	Torque Range		Max Torque		Weight		Length		Air Usage (cfm)	Air Inlet
						ft-lb	Nm	ft-lb	Nm	lb	kg	in	mm		
3/4" Wrenches															
2P-155034	Industrial	Composite	Twin	3/4"	6,000	625 - 1,250	850 - 1,690	1,400	1,890	6.7	3.05	8.2	209	7	3/8"
1" Wrenches															
2P-15501	Industrial	Composite	Twin	1"	5,000	500 - 2,000	678 - 2,710	2,250	3,050	13	5.9	10	256	12	1/2"
2450 2450L	Industrial	Sandcast aluminum	Twin	1"	6,000	940 - 1,450	1,274 - 1,965	1,600	2,169	19	8.5	19.5	495	26	1/2"
2453	Industrial	Steel	Twin	1"	3,900	670 - 1,300	908 - 1,760	1,600	2,169	20.2	9	18	457	26	1/2"
2463	Industrial	Steel	Twin	1"	3,900	670 - 1,300	908 - 1,760	1,600	2,169	20.2	9	22	559	26	1/2"

1"- 1-1/2" IMPACT WRENCHES

2403L

1" Twin Hammer
Composite Impact Wrench, Extended

INDUSTRIAL DUTY



WORKING TORQUE: 1,875 FT-LB

- Composite housing reduces weight
- Extended anvil
- Twin hammer design
- Swivel exhaust

2S-290015

1-1/2" Pinless Lightweight Heavy-Duty Impact Wrench

INDUSTRIAL DUTY



WORKING TORQUE: 3,000 FT-LB

- High power-to-weight ratio
- Inside trigger design for safety
- Reversible D handle for ergonomic handling of the tool by right or left handed operators
- Efficient air motor design for best use of air pressure and volume on most job sites

Model	Application	Housing	Hammer	Drive Size	Approx. Speed (rpm)	Torque Range		Max Torque		Weight		Length		Air Usage (cfm)	Air Inlet
						ft-lb	Nm	ft-lb	Nm	lb	kg	in	mm		
1" Wrenches															
2403L	Industrial	Composite	Twin	1"	4,000	1,250 - 1,875	1,695 - 2,550	2,000	2,825	21.3	9.7	23	584	25	1/2"
1-1/2" Wrenches															
2S-290015	Industrial	Aluminum	Swing	1-1/2"	4,000	750 - 3,000	1,016 - 4,050	3,300	4,455	33.7	15.3	24.4	620	12	1/2"



RATCHET WRENCHES RATCHET WRENCHES

If you need to reach small bolts in tight places,
Eagle Group's ergonomic ratchet wrenches are the tools you need. These wrenches are ideally suited for light and medium duty industrial and maintenance applications, including body shop work, water pumps, radiators, spark plugs, air conditioning, and light assembly.

3115 1/4" Ratchet Wrench

GENERAL DUTY

- Rear exhaust with silencer
- Extended ratchet housing for greater reach
- For smaller fasteners



WORKING TORQUE: 18 FT-LB

GENERAL DUTY



WORKING TORQUE: 55 FT-LB

3105 1/2" Ratchet Wrench

- Excellent for general purpose use
- Improved gear head extends life
- Powerful for tough jobs

3320 1/2" Ratchet Wrench

INDUSTRIAL DUTY

- Excellent for general purpose use
- Improved gear head extends life
- Powerful for tough jobs
- Patented head design for increased durability



WORKING TORQUE: 80 FT-LB

3/8" RATCHET WRENCHES

3100

GENERAL DUTY



WORKING TORQUE: 24 FT-LB

- Ball & needle bearing construction for long life
- Internal ring gear with three planetary gears

3205

GENERAL DUTY



WORKING TORQUE: 30 FT-LB

- Composite grip for increased operator comfort
- Built-in grease fitting for lubrication ease

3220

INDUSTRIAL DUTY




WORKING TORQUE: 80 FT-LB

- Composite grip for increased operator comfort
- Built-in grease fitting for lubrication ease
- Patented head design for increased durability

Model	Application	Housing	Drive Size	Approx. Speed (rpm)	Approx. Torque		Weight		Length		Air Usage (cfm)	Air Inlet
					ft-lb	Nm	lb	kg	in	mm		
3115	General	Aluminum/steel	1/4"	230	18	24	1.4	0.6	8	203	10	1/4"
3100	General	Aluminum/steel	3/8"	160	24	33	2.6	1.2	10.5	267	16	1/4"
3205	General	Composite/steel	3/8"	160	30	40	2.5	1.1	10.5	267	18	1/4"
3220	Industrial	Composite/steel	3/8"	280	80	109	2.7	1.2	10.9	277	4	1/4"
3105	General	Aluminum/steel	1/2"	150	55	74	3.1	1.4	14.5	368	21	1/4"
3320	Industrial	Aluminum/steel	1/2"	280	80	109	2.7	1.2	10.9	277	4	1/4"

PULSE TOOLS

PULSE TOOLS

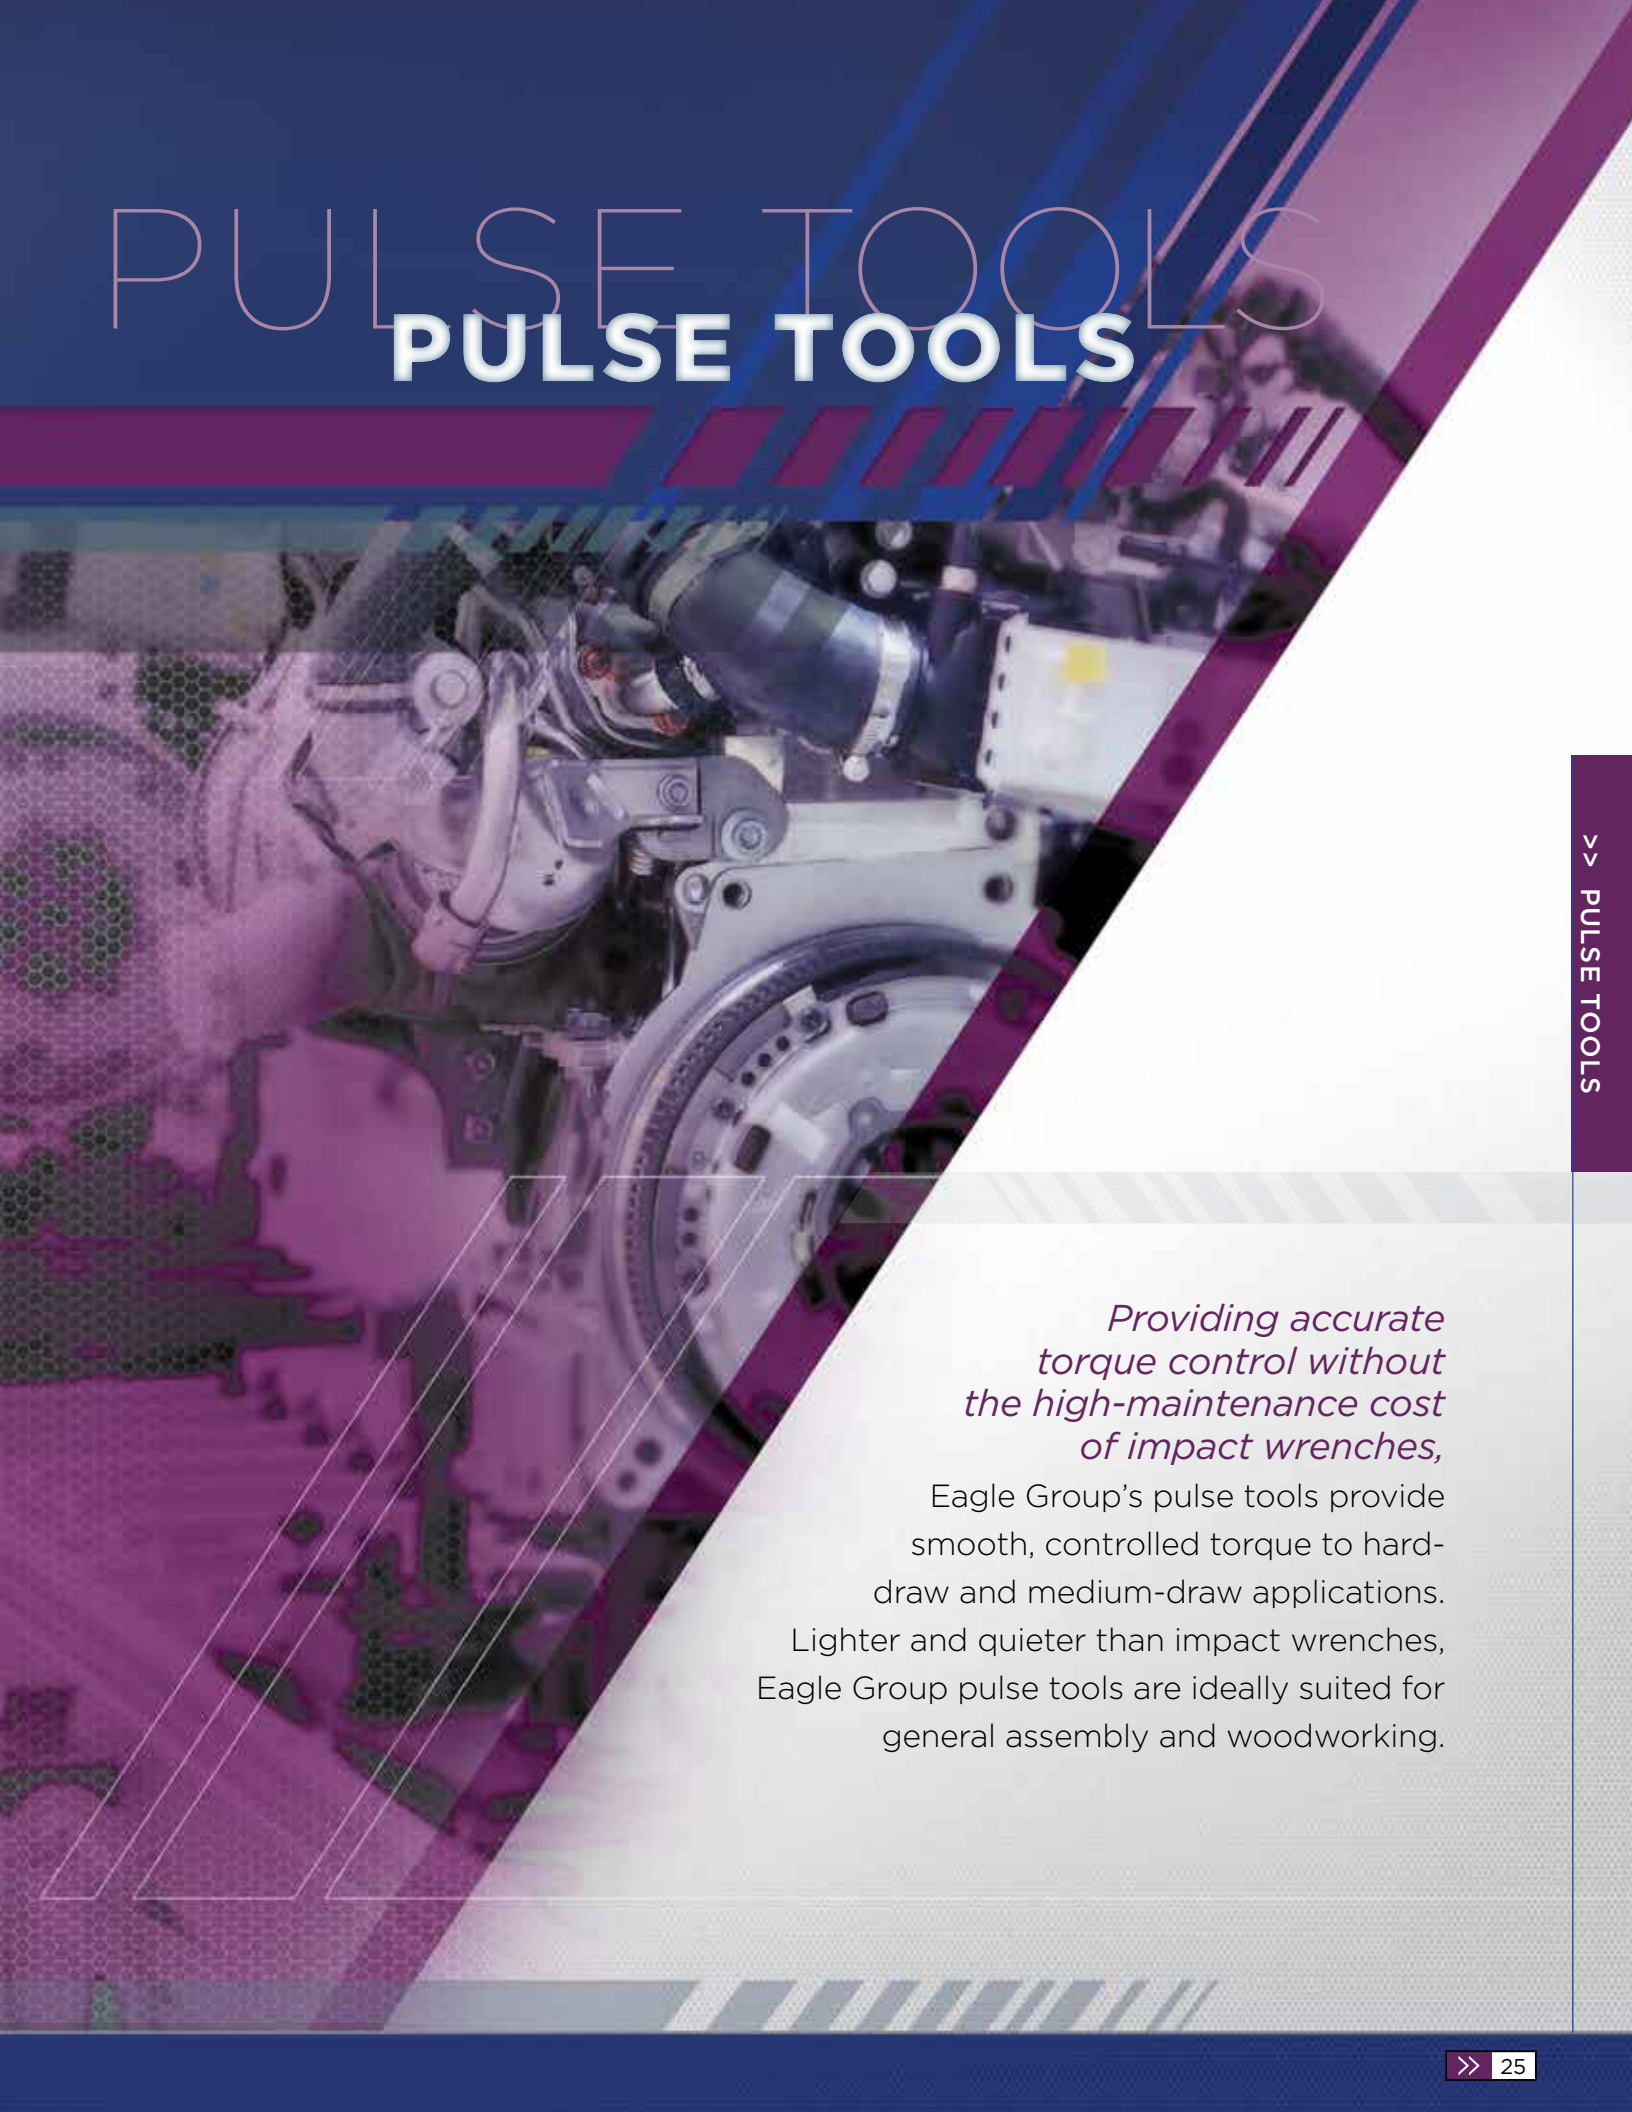

>> PULSE TOOLS

Providing accurate torque control without the high-maintenance cost of impact wrenches,

Eagle Group's pulse tools provide smooth, controlled torque to hard-draw and medium-draw applications. Lighter and quieter than impact wrenches, Eagle Group pulse tools are ideally suited for general assembly and woodworking.

1/4" Q.C. & 3/8" SQ. DR. NON SHUT-OFF PULSE TOOLS

9020D

1/4" Quick Change
Pistol Pulse Driver

GENERAL DUTY



FOR SCREWS
TORQUE RANGE: 10 - 19 FT-LB

9025D

1/4" Quick Change
Pistol Pulse Driver



FOR SCREWS
TORQUE RANGE: 15 - 20 FT-LB

9025

3/8" Pistol Pulse
Driver



FOR BOLTS AND NUTS
TORQUE RANGE: 17 - 20 FT-LB

- Quiet operation and low vibration
- No torque reaction even at high torque
- Lightweight
- Accurate torque means no stripped threads or broken screws
- Easy maintenance with few parts to replace

Model	Application	Housing	Drive Size/ Anvil	Approx. Speed (rpm)	Torque Range		Weight		Length		Air Usage (cfm)	Air Inlet
					ft-lb	Nm	lb	kg	in	mm		
9020D	General	Aluminum	1/4" QC	7,000	10 - 19	13 - 25	2	0.9	6	15.2	11	1/4"
9025D	General	Aluminum	1/4" QC	7,000	15 - 20	20 - 27	2.1	1	6.6	16.7	16	1/4"
9025	General	Aluminum	3/8"	7,000	17 - 22	22 - 29	2.1	1	6.4	16.2	16	1/4"

ASSEMBLY TOOLS

ASSEMBLY TOOLS



*Available in a variety
of clutch styles and
torque ranges,*

Eagle Group's ergonomic screwdrivers are the go-to tools for furniture, woodworking, motor home, boat, RV, van conversion, and appliance industries.

ASSEMBLY TOOL CLUTCH INFORMATION

The variety of Eagle Group's assembly clutch tools ensures that you match the right tool with your application's requirements for precision, speed, power, torque, type of draw, or screw size.



Adjustable Clutch



The adjustable clutch ratchets upon reaching torque. It provides general torque control.

Uses

- General assembly
- Woodworking

Benefits:

- Wide torque range
- High torque output
- High speed

Positive Clutch



A positive clutch ratchets upon reaching torque. Operator can increase torque output with forward/downward pressure.

Uses

- General assembly
- High prevailing torque
- Woodworking
- Soft joints

Benefits:

- Can provide higher rundown torque than seated torque
- Wide torque range

Stall



With a stall clutch, the air motor stalls out upon reaching torque. Torque is proportionate to the air pressure setting.


Uses

- Woodworking
- Soft joints
- Sheet metal screws

Benefits:

- Small, light tool
- Simple maintenance
- Torque adjusted by air pressure

Auto Shut-off



The auto-shutoff clutch has an internal cam that shuts off instantly upon reaching a preset torque level. It provides precise torque control.

Uses

- General assembly
- Critical applications
- All joint types
- High production

Benefits:

- Torque control
- Low maintenance
- Fast cycle times
- Low Noise

Impact



An impact clutch has a twin hammer impact mechanism.

Uses

- Industrial maintenance
- Tire service
- Heavy assembly

Benefits:

- Fast cycle times

STALL & ADJUSTABLE CLUTCH SCREWDRIVERS

1101 1/4" Stall Screwdriver

GENERAL DUTY

- 1/4" quick change chuck
- High power-to-weight ratio



TORQUE RANGE: 10 - 45 in-lb

1105 1/4" Stall Screwdriver

INDUSTRIAL DUTY

- 1/4" quick change chuck
- High power-to-weight ratio
- Side trigger for easy one-hand reverse



TORQUE RANGE: 20 - 52 in-lb

7P-1028-1 1/4" Stall Screwdriver

7P-0620-1 1/4" Stall Screwdriver

INDUSTRIAL DUTY



TORQUE RANGE: 13 - 32 in-lb



TORQUE RANGE: 18 - 45 in-lb

- Reversible bar on top enables one-hand operation
- Industrial-grade quick change chuck
- 3 Planet industrial-strength gear train provides durability for heavy-duty applications
- Improved muffler design
- Comfort-grip handle
- Spindle with special heat treatment

1102 1/4" Adjustable Clutch Screwdriver

GENERAL DUTY

- Cushion clutch
- Handle exhaust directs air away
- Convenient forward/reverse valve



TORQUE RANGE: 55 - 160 in-lb

Model	Application	Housing	Drive Size/ Chuck Capacity	Approx. Speed (rpm)	Approx. Torque Range		Weight		Length		Air Usage (cfm)	Air Inlet	Noise Level db(A)
					in-lb	Nm	lb	kg	in	mm			
1101	General	Sandcast aluminum	1/4" QC	1,800	10 - 45	1.1 - 5.1	3	1.4	7	178	16	1/4"	85
1105	Industrial	Sandcast aluminum	1/4" QC	800	20 - 52	2.3 - 5.9	1.5	0.7	5.1	130	14	1/4"	83
7P-1028-1	Industrial	Sandcast Aluminum	1/4" QC	2,800	13 - 32	2.3 - 5.7	2.4	1.2	9.2	234	4	1/4"	88
7P-0620-1	Industrial	Sandcast Aluminum	1/4" QC	2,000	18 - 45	3.2 - 8	2.3	1	8.5	216	4	1/4"	88
1102	General	Aluminum	1/4" QC	1,800	55 - 160	6.2 - 20.8	2.6	1.2	8.8	222	16	1/4"	83

POSITIVE CLUTCH & IMPACT SCREWDRIVERS

POSITIVE CLUTCH SCREWDRIVERS

1115

GENERAL DUTY



TORQUE RANGE: 60 - 40 ft-lb

1121

INDUSTRIAL DUTY



TORQUE RANGE: 14 - 35 ft-lb

- 1/4" quick change chuck
- High power-to-weight ratio
- For wood and general assembly

1115

1121

Application	General	Industrial
Housing	Aluminum	Sandcast aluminum
Drive Size/ Chuck Capacity	1/4" QC	1/4" QC
Approx. Speed (rpm)	1,800	1,800
Approx. Torque Range	16 - 40 ft-lb 21.5 - 53.7 Nm	14 - 35 ft-lb 18.8 - 46.9 Nm
Weight	2.6 lb / 1.2 kg	2.5 lb / 1.1 kg
Length	8" / 203 mm	6.8" / 171 mm
Air Usage (cfm)	16	16
Air Inlet	1/4"	1/4"
Noise Level db(A)	88	88

INDUSTRIAL DUTY



TORQUE RANGE: 10 - 31 ft-lb

1550

1/4" Twin Hammer Impact Screwdriver

- No torque reaction
- Fast efficient tightening tool
- High power-to-weight ratio

1577

1/4" Impact Screwdriver

- 7 vane high speed motor
- Totally enclosed pinless impact mechanism with advanced heat treatment
- Tease throttle with 4-stop regulator for speed control and torque output
- 360° adjustable rear exhaust
- Detachable belt clip

INDUSTRIAL DUTY



TORQUE RANGE: 10 - 65 ft-lb

Model	Application	Housing	Drive Size/ Chuck Capacity	Approx. Speed (rpm)	Approx. Torque Range		Weight		Length		Air Usage (cfm)	Air Inlet	Noise Level db(A)
					ft-lb	Nm	lb	kg	in	mm			
1550	Industrial	Aluminum/steel	1/4" QC	10,500	10 - 31	13.6 - 42.2	1.2	0.55	6.8	173	2.5	1/4"	98
1577	Industrial	Sandcast Aluminum	1/4" QC	10,000	10 - 65	13.4 - 88.1	2.3	1.04	6.5	165	29	1/4"	94

TORQUE CONTROLLED SCREWDRIVERS

TORQUE CONTROLLED PNEUMATIC SCREWDRIVERS

INDUSTRIAL DUTY

- Long lasting clutch design – 2,000,000 cycle tested
- Quick shut off clutch
- Accurate torque delivery
- Simple torque adjustment
- Great power to weight for best ergonomics

INLINE

EPTS-3300 Series

LIGHTWEIGHT
3.5 – 18.5 IN-LB
FREE SPEEDS: 1,100 / 1,700 / 2,300 RPM



EPTS-3400 Series

6.2 – 35.2 IN-LB
FREE SPEEDS: 800 / 1,500 / 2,100 RPM



PISTOL

EPTS-3300P Series

LIGHTWEIGHT
8.9 – 19.9 IN-LB
FREE SPEEDS: 1,100 / 1,700 / 2,300 RPM



EPTS-3400P Series

8.9 – 33.2 IN-LB
FREE SPEEDS: 800 / 1,500 / 2,100 RPM



EPTS-3500P Series

9.7 – 92.4 IN-LB
FREE SPEEDS: 500 / 800 / 1,700 RPM



ANGLE

EPTS-N3400 Series

9 – 110 IN-LB
FREE SPEED: 300 RPM



Model	Application	Housing	Drive Size/ Chuck Capacity	Approx. Speed (rpm)	Approx. Torque Range		Weight		Length		Air Usage (cfm)	Air Inlet	Noise Level db(A)
					in-lb	Nm	lb	kg	in	mm			
Inline													
EPTS-33011-25Q	Industrial	Aluminum	1/4" QC	1,100	9.7 - 18.5	1.1 - 2.1	0.9	0.4	7.4	187	7	1/4"	70
EPTS-33017-25Q	Industrial	Aluminum	1/4" QC	1,700	6.2 - 13.2	0.7 - 1.5	0.9	0.4	7.4	187	7	1/4"	70
EPTS-33023-25Q	Industrial	Aluminum	1/4" QC	2,300	3.5 - 13.2	0.4 - 1.5	0.9	0.4	7.4	187	7	1/4"	71
EPTS-34008-25Q	Industrial	Aluminum	1/4" QC	800	14.1 - 35.2	1.6 - 4	1.4	0.7	8.2	209	10.5	1/4"	70
EPTS-34015-25Q	Industrial	Aluminum	1/4" QC	1,500	9.7 - 23	1.1 - 2.6	1.4	0.7	8.2	209	10.5	1/4"	70
EPTS-34021-25Q	Industrial	Aluminum	1/4" QC	2,100	6.2 - 19.4	0.7 - 2.2	1.4	0.7	8.2	209	10.5	1/4"	74
Pistol													
EPTS-33011P-25Q	Industrial	Aluminum	1/4" QC	1,100	8.9 - 19.9	1 - 2.3	0.9	0.4	7.4	187	7	1/4"	70
EPTS-33017P-25Q	Industrial	Aluminum	1/4" QC	1,700	9.7 - 15.5	1.1 - 1.8	0.9	0.4	7.4	187	7	1/4"	70
EPTS-33023P-25Q	Industrial	Aluminum	1/4" QC	2,300	10.2 - 17.7	1.2 - 2	0.9	0.4	7.4	187	7	1/4"	71
EPTS-34008P-25Q	Industrial	Aluminum	1/4" QC	800	14.2 - 33.2	1.6 - 3.8	1.4	0.7	8.2	209	10.5	1/4"	70
EPTS-34015P-25Q	Industrial	Aluminum	1/4" QC	1,500	8.9 - 26.6	1 - 3	1.4	0.7	8.2	209	10.5	1/4"	70
EPTS-34021P-25Q	Industrial	Aluminum	1/4" QC	2,100	10.6 - 24.3	1.2 - 2.8	1.4	0.7	8.2	209	10.5	1/4"	74
EPTS-35005P-25Q	Industrial	Aluminum	1/4" QC	500	44 - 92.4	5 - 10.5	2.2	1	9.5	241	17.5	1/4"	74
EPTS-35008P-25Q	Industrial	Aluminum	1/4" QC	800	26.4 - 48.4	3 - 5.5	2.2	1	9.5	241	17.5	1/4"	75
EPTS-35017P-25Q	Industrial	Aluminum	1/4" QC	1,700	9.7 - 23	1.5 - 2.6	2.2	1	9.5	241	17.5	1/4"	75
Angle													
EPTS-N34003-25	Industrial	Aluminum	1/4" sq	300	9 - 110	1 - 12	2.4	1.08	14.5	368	17.5	1/4"	75
EPTS-N34003-38	Industrial	Aluminum	3/8" sq	300	9 - 110	1 - 12	2.4	1.08	14.5	368	17.5	1/4"	75

SIW SHUT-OFF IMPACT WRENCH

INDUSTRIAL DUTY



SERIES TORQUE RANGE: 2 - 89 ft-lb

- Operates as a standard impact wrench or as an impact wrench with a programmable shut-off point
- Brushless motor provides longer motor life and increased efficiency
- Easy-to-read process information lights
- LED light for work-area illumination
- Programmable buttons
- Mini USB port for connection to optional programmer (SPC-2PGM)
- Li-Ion battery provides long battery life

SIW SERIES ACCESSORIES

SIW-B20LI Li-Ion Battery

- 20V, 2.0 Ah



SIW-B20LI-HC High Capacity Li-Ion Battery

- 20V, 4.0 Ah



SIW-C18-20 Battery Charger

- Output: 18 - 20V, 4.0 Ah
- Input: 100 - 240VAC, 50 - 60 Hz



BJ10091 Body Jacket Cover



SIW-PBL Suspension Bail



SIW-38PR (3/8" Dr.) SIW-50PR (1/2" Dr.) Pin Retainer Kits



Model	Application	Housing	Drive Size	Approx. Speed (rpm)	Approx. Torque Range		Max Torque		Battery V	Weight		Noise Level db(A)
					ft-lb	Nm	ft-lb	Nm		lb	kg	
SIW-P2525Q	Industrial	Composite	1/4" QC	2,400	2 - 18	3 - 25	30	40	20	2.2	1	71
SIW-P3225Q	Industrial	Composite	1/4" QC	2,400	4 - 24	6 - 32	66	90	20	2.2	1	71
SIW-P3238	Industrial	Composite	3/8" Sq Dr	2,400	4 - 24	6 - 32	66	90	20	2.2	1	71
SIW-P5538	Industrial	Composite	3/8" Sq Dr	2,400	11 - 41	15 - 55	90	120	20	2.4	1.1	71
SIW-P5550	Industrial	Composite	1/2" Sq Dr	2,400	11 - 41	15 - 55	90	120	20	2.4	1.1	71
SIW-P10050	Industrial	Composite	1/2" Sq Dr	2,400	18 - 74	25 - 100	133	180	20	2.4	1.1	71
SIW-P12050	Industrial	Composite	1/2" Sq Dr	2,400	22 - 89	30 - 120	155	210	20	2.9	1.3	71

Shut-Off Impact Tools Include: Body Jacket, Bail, and one (1) 18V Li-Ion Battery

Signature Series CORDLESS TOOLS



SPC PRECISION CLUTCH TOOLS

INDUSTRIAL DUTY

SERIES TORQUE RANGE: 0.6 - 74 ft-lb

- LED indicator provides simple process information to the operator. The signal is visible from any angle
- Press button for easy F/R operation
- LED light for working in dark areas
- Trigger repeat protection avoids double hits on already seated screws
- Easily attached sliding battery system
- Mini USB port for connection to optional programmer (SPC-2PGM)
- Li-Ion battery pack delivers longer run time
- Ergonomic handle design provides outstanding balance and weight and is ideal for accessing hard-to-reach locations
- Angle tool enables multiple head positions

Model	Application	Housing	Drive Size	Free Speed Range (rpm)	Approx. Torque Range		Battery V	Weight		Noise Level db(A)
					ft-lb	Nm		lb	kg	
Pistol Nutrunner*										
SPC-P2325Q	Industrial	Composite	1/4" QC	500 - 1,550	0.6 - 2.2	0.8 - 3	18	2.1	0.95	75
SPC-P2625Q	Industrial	Composite	1/4" QC	300 - 1,000	0.7 - 4.4	1.0 - 6	18	2.1	0.95	75
SPC-P2925Q	Industrial	Composite	1/4" QC	300 - 800	1.1 - 6.6	1.5 - 9	18	2.1	0.95	75
SPC-P21225Q	Industrial	Composite	1/4" QC	250 - 600	1.5 - 8.8	2 - 12	18	2.1	0.95	75
Right Angle Nutrunner**										
SPC-A21025Q	Industrial	Composite	1/4" QC	400 - 1,000	2.2 - 8.8	3 - 12	18	3.5	1.6	75
SPC-A21025	Industrial	Composite	1/4" Sq	400 - 1,000	2.2 - 8.8	3 - 12	18	3.5	1.6	75
SPC-A21038	Industrial	Composite	3/8" Sq	400 - 1,000	2.2 - 8.8	3 - 12	18	3.5	1.6	75
SPC-A21625Q	Industrial	Composite	1/4" QC	300 - 600	3.7 - 13.3	5 - 18	18	3.5	1.6	75
SPC-A21625	Industrial	Composite	1/4" Sq	300 - 600	3.7 - 13.3	5 - 18	18	3.5	1.6	75
SPC-A21638	Industrial	Composite	3/8" Sq	300 - 600	3.7 - 13.3	5 - 18	18	3.5	1.6	75
SPC-A23038	Industrial	Composite	3/8" Sq	250 - 480	5.9 - 22	8 - 30	18	3.5	1.6	75
SPC-A23538	Industrial	Composite	3/8" Sq	220 - 330	7.4 - 25.8	10 - 35	18	3.5	1.6	75
SPC-A25038	Industrial	Composite	3/8" Sq	200 Non-Programmable Fixed Speed***	7.4 - 37	10 - 50	18	5.3	2.4	75
SPC-A27038	Industrial	Composite	3/8" Sq	170 Non-Programmable Fixed Speed***	14.8 - 51.7	20 - 70	18	6.3	2.9	75
SPC-A210050	Industrial	Composite	1/2" Sq	119 Non-Programmable Fixed Speed***	26 - 74	35 - 100	18	7.4	3.4	75

* Pistol Grip Tools include: Torque Adjustment Tool and one (1) 18V Li-Ion Battery

** Angle Nutrunners include: Torque Adjustment Tool, Head Indexing Spanner Wrench, and one (1) 18V Li-Ion Battery

*** High torque tools feature fixed RPM

Signature Series CORDLESS TOOLS

SPC SERIES ACCESSORIES

SPC-B218LI Li-Ion Battery

- 18V, 2.0 Ah



SPC-B218LI-HC High Capacity Li-Ion Battery

- 18V, 4.0 Ah



SPC-C218-20 Battery Charger

- Output:
18 - 19.2V, 3.0 Ah
- Input:
100 - 240VAC, 50 - 60 Hz



BJ10082 Pistol Tool Body Jacket Cover



BJ10083 Angle Tool Body Jacket Cover



21226 Tool Basket

- Designed for Signature Series pistol and angle tools
- Can be affixed to a bench or rack



SPC-QC Quick Clip

- Designed for Signature Series pistol tools
- Comes with a belt clip and a stretch cord attachment
- Ball feature allows for quick and easy release



TOOL SPEED PROGRAMMER



SPC-2PGM

Each Signature Series battery tool has programmable features that enhance operator efficiency. Programmable features include:

- Tool speed control from minimum (1,500 rpm) to maximum (2,400 rpm) speed in 50 rpm increments
- Forward/Reverse Mode - Three setting options
- Two-stage trigger delay control
- Screw count / impact count
- Supervisor level "lock-out" control

Additionally, the Signature Series battery tool has an integrated mini USB connector that couples to the Signature Series Programmer module. Simply connect the tool to the Programmer Module and flash the tool to the desired RPM. The programmed RPM will remain until a change is desired.

DRILLS DRILLS

*Rugged construction,
powerful air motors,
and varied RPMs*

provide you many options for selecting the ideal Eagle Group drill for your job. These drills are designed for precision drilling, honing, hole sawing, wood boring, counter-sinking, and wire brushing applications.

DRILLS

7005 1/4" Reversible Drill

GENERAL DUTY



1,800 RPM

7110 3/8" Reversible Drill

GENERAL DUTY



1,800 RPM

- Easy reach reverse selector
- Equipped with Jacobs Chuck®
- Bottom handle exhaust

7650 3/8" Reversible Angle Drill

GENERAL DUTY



1,500 RPM

- For general purpose drilling in confined areas
- Convenient forward/reverse button
- Rear exhaust
- Equipped with Jacobs Chuck®

UT-60-07 / UT-60-07-ASSY 5/16" Reversible Tapper

- Push/Pull auto-reversing clutch
- Power controlled by built-in regulator located on the handle
- UT-60-07 includes no chuck
- UT-60-07-ASSY includes a 3/8" Jacobs Chuck®

INDUSTRIAL DUTY



UT-60-07



UT-60-07-ASSY

680 RPM

UT-60-7 / UT-60-7-ASSY

Application	Industrial
Housing	Sandcast aluminum
Tapping Capacity	5/16"
Approx. Speed (rpm)	680
Weight	1.8 lb / 0.8 kg
Length	9.6" / 244 mm
Air Usage (cfm)	18
Air Inlet	1/4"

7100 3/8" Inline Drill, Non-Reversible

GENERAL DUTY



1,500 RPM

- Inline design for tight space applications
- Ribbed steel housing for better grip

Model	Application	Housing	Chuck Capacity	Reversible/ Non-Reversible	Approx. Power (hp)	Approx. Speed rpm	Weight		Length		Air Usage (cfm)	Air Inlet
							lb	kg	in	mm		
7005	General	Composite/steel	1/4" Jacobs	Reversible	0.6	1,800	1.8	0.8	7.2	184	13.7	1/4"
7110	General	Composite/steel	3/8" Jacobs	Reversible	0.6	1,800	1.8	0.8	7.2	184	13.7	1/4"
7650	General	Aluminum/steel	3/8" Jacobs	Reversible	0.6	1,500	2.3	1	8.3	211	14	1/4"
7100	General	Aluminum/steel	3/8"	Non-Reversible	0.4	1,500	2.3	1	9	229	16	1/4"

7102 3/8" Reversible Drill

- Positive action trigger controls speed
- For drilling, counter sinking, and wire brushing



7107 3/8" Non-Reversible Drill

- Positive action trigger controls speed
- For drilling, counter sinking, and wire brushing



Model	Application	Housing	Chuck Capacity	Reversible/ Non-Reversible	Approx. Power (hp)	Approx. Speed rpm	Weight		Length		Air Usage (cfm)	Air Inlet
							lb	kg	in	mm		
7102	General	Sandcast aluminum/steel	3/8"	Reversible	0.5	1,800	3	1.4	7	178	16	1/4"
7107	General	Aluminum/steel	3/8"	Non-reversible	0.6	2,600	4	1.8	7	178	20	1/4"

VARIABLE-SPEED INDUSTRIAL DRILLS

REVERSIBLE

714P-2100R 1/4" Drill



NON-REVERSIBLE

738P-3200 3/8" Drill



712P-420 1/2" Drill



- Precision machined gears
- Robust sandcast aluminum housing
- Steel front end
- Ergonomic handle design
- Equipped w/Jacobs Chuck®
- Variable speed trigger
- Muffled directional rear exhaust

Model	Application	Housing	Chuck Capacity	Reversible/ Non-Reversible	Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
							lb	kg	in	mm		
714P-2100R	Industrial	Sandcast aluminum/steel	1/4" Jacobs	Reversible	0.6	2,100	1.6	0.73	6.87	175	16	1/4"
738P-3200	Industrial	Sandcast aluminum/steel	3/8" Jacobs	Non-reversible	0.6	3,200	2.65	1.2	7.25	184	16	1/4"
712P-420	Industrial	Sandcast aluminum/steel	1/2" Jacobs	Non-reversible	1	420	2.95	1.34	8.5	216	16	1/4"

GENERAL DUTY



800 RPM

7106

1/2" Reversible Drill

- Positive action trigger controls speed
- For drilling, counter sinking, and wire brushing

Model	Application	Housing	Chuck Capacity	Reversible/ Non-Reversible	Approx. Power (hp)	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
							lb	kg	in	mm		
7106	General	Aluminum/ steel	1/2"	Reversible	0.6	800	4	1.8	7	178	20	1/4"

ONE-HAND OPERATION, INDUSTRIAL REVERSIBLE DRILLS

>> DRILLS

- Reversible bar on top enables one-hand operation
- Industrial-grade chuck
- 3 Planet industrial-strength gear train provides durability for heavy-duty drilling
- Improved muffler design
- Comfort-grip handle
- Spindle with special heat treatment

0.6 HP MODELS



Keyed

7P-0620-2: 1/4"

7P-0620-4: 3/8"

Application	Industrial
Housing	Sandcast aluminum/ steel
Reversible/ Non-Reversible	Reversible
Approx. Power (hp)	0.6
Approx. RPM	2,000
Weight	2.3 lb / 1 kg
Length	8.5" / 216 mm
Air Usage (cfm)	4
Air Inlet	1/4"



Keyless

7P-0620-5: 3/8"

7P-0620-7: 1/2"

1.0 HP MODELS



Keyed

7P-1028-4: 3/8"

Application	Industrial
Housing	Sandcast aluminum/ steel
Reversible/ Non-Reversible	Reversible
Approx. Power (hp)	1
Approx. RPM	2,800
Weight	2.4 lb / 1.2 kg
Length	9.2" / 234 mm
Air Usage (cfm)	4
Air Inlet	1/4"



Keyless

7P-1028-5: 3/8"

7P-1028-7: 1/2"

PERCUSSION TOOLS PERCUSSION TOOLS



*Tough jobs
require tough tools*

and Eagle Group's durable hammers, chippers, and needle scalers offer the long-lasting power you need for both general and industrial applications. Ideal for foundries, fabrication shops, shipbuilding, and construction applications.

AIR HAMMERS

GENERAL DUTY



2,100 BPM

4100

Air Hammer
2.375" Stroke

- Positive action trigger controls speed
- Heavy-duty spring retainer

INDUSTRIAL DUTY



2,100 BPM

4178

Air Hammer
3.625" Stroke

- Heavy-duty spring retainer
- Long lasting
- For front end, exhaust, frame, and body work

4260

Air Hammer
3.75" Stroke

- Feathering throttle for control
- Heavy-duty spring retainer
- For riveting applications

GENERAL DUTY



1,800 BPM

4001

Air Hammer
2.625" Stroke

- Economical air hammer for fast cutting action
- For muffler and pipe removal, body shop work, scraping rust, and light front-end work
- For exhaust system, panel cutting, and general repair work
- Includes 6" chisel with 1-3/8" angle blade

GENERAL DUTY



3,500 BPM

4009

Chipping Hammer
2" Stroke

INDUSTRIAL DUTY



1,900 BPM

4010

Chipping Hammer
3" Stroke

INDUSTRIAL DUTY



1,700 BPM

- Drop forged handle
- Front exhaust
- Oval collar
- For paint, scale, and rust removal

>> PERCUSSION TOOLS

Model	Application	Housing	For use with	Chisel Shank	Bore (in)	Stroke (in)	Approx. bpm	Weight lb	kg	Length in	mm	Air Usage (cfm)	Air Inlet
4100	General	Aluminum/steel	Chisel	0.401"	0.75	2.375	2,100	3.3	1.5	7.8	198	10	1/4"
4001	General	Aluminum/steel	Chisel	0.401"	0.75	2.625	3,500	3.8	1.7	6.8	171	15	1/4"
4178	Industrial	Aluminum/steel	Chisel	0.401"	0.75	3.625	2,100	4.3	2	8.5	216	12	1/4"
4260	General	Aluminum/steel	Chisel	0.498"	0.75	3.750	1,800	5.5	2.5	7.8	198	12	1/4"
4009	Industrial	Aluminum/steel	Chisel	.68 round or .58 hex bushing	1.125	2.0	1,900	16	7.3	15.5	394	12	1/2"
4010	Industrial	Aluminum/steel	Chisel	.68 round or .58 hex bushing	1.125	3.0	1,700	17.8	8.1	16.3	413	12	1/2"

NEEDLE SCALERS & FLUX CHIPPERS

4004
Flux Chipper
1.5" Stroke

4005
Needle Scaler
1.5" Stroke

4005SC
Needle Scaler/
Chipper, 1.5" Stroke




- Hardened barrels and strict tolerances for maximum life
- Scaler: For foundries, fabrication shops, ship building, and construction
- Chipper: For rust weld slag, and old paint removal

	4004	4005	4005SC
Application	Industrial		
Housing	Steel		
For Use With	7" Angle Chisel (730224C)	Needles (9024/9043)	Needles (9024/9043) 7" Angle Chisel (730224C)
Needle/Chisel Diameter	Chisel: 0.401"	19 @ 3 mm each	19 @ 3 mm each Chisel: 0.373"
Bore	1"		
Stroke	1.5"		
Approx. BPM	4,600		
Weight	5.8 lb / 2.6 kg	6.2 lb / 2.8 kg	6.2 lb / 2.8 kg
Length	9.8" / 248 mm	18" / 457 mm	18" / 457 mm
Air Usage (cfm)	12		
Air Inlet	1/4"		

ACCESSORIES


9024 / 9043
Replacement
Needles



For 4005, 4005SC, 4615, and 4620 needle scalars. Sold as individual needles (see tool set requirements).

	Length	Diameter
9024	7" 175 mm	1/8" 3.18 mm
9043	5" 127 mm	1/8" 3.18 mm

730224C
7" Angle Chisel



For 4004 and 4005SC flux chippers

4615
Mini Needle Scaler
2.375" Stroke



- Straight handle for hard-to-reach areas
- 12-piece 3 mm needle set included
- For rust, weld slag, and old paint removal

4620
Pistol Needle Scaler
2.375" Stroke



- Heavy-duty scaler with pistol grip
- 28-piece 3 mm needle set included
- For rust, weld slag, and old paint removal

Model	Application	Housing	For use with	Needle/Chisel Diameter	Bore (in)	Stroke (in)	Approx. bpm	Weight		Length		Air Usage (cfm)	Air Inlet
								lb	kg	in	mm		
4615	Industrial	Steel	Needles (9024/9043)	12 @ 3 mm each	1	2.375	4,000	2.8	1.3	11.5	292	4	1/4"
4620	Industrial	Aluminum/steel	Needles (9024/9043)	28 @ 3 mm each	1	2.375	4,500	8	3.6	13.8	351	7	1/4"

CUTTING & SPECIALTY TOOLS

CUTTING & SPECIALTY TOOLS



Eagle Group offers a variety of speciality tools, including saws, cut-off tools, tire buffers, and blow guns.

SAWS

6050 Reciprocating Saw

- High performance motor provides aggressive cutting action
- Insulated handle
- For cutting plastics, fiberglass, and sheet metal



6080 Low-Vibration Reciprocating Saw

- 35% longer stroke for "quicker and thicker" material cuts
- Patented vibration-damped cylinder design decreases vibration emission by 40%
- Patented blade guard prevents metal filing from entering the inner mechanism



Model	Application	Housing	Approx. spm	Teeth	Stroke (mm)	Weight		Length		Air Usage (cfm)	Air Inlet
						lb	kg	in	mm		
6050	General	Aluminum	9,500	14 / 24 / 32	10	2.2	1	9.3	236	7	1/4"
6080	Industrial	Aluminum	10,000	24 / 32	14	1.37	0.62	8.9	227	2.3	1/4"

INDUSTRIAL BACK-GOUGING ANGLE SAWS

5A-0514-2 Back-Gouging Mini Saw

- Industrial-grade and compliant tool design ensures fast and effective back-gouging
- Angle height: 1.75"
- 2" carbide tooth blade (#5A-0514-2CB) sold separately
- For gouging tight access seams



0.5 HP

BLADE SOLD SEPARATELY

5G-10125 5" Angle Saw

- Left/right hand use
- Governed motor
- Removable base plate
- Side to Side: 31 mm from front blade edge to shoe edge
- Depth Cut Adjustment:
Min: 1/8" (3 mm)
Max: 1" (12.5 mm)



1.0 HP



BLADE SOLD SEPARATELY

Model	Application	Housing	Max Blade Diameter	Arbor	Power (hp)	Approx. Speed (rpm)	Max. Blade Exposure	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
										lb	kg	in	mm		
5A-0514-2	Industrial	Steel	2"	3/8"-24	0.5	14,000	—	Lever	Side	3	1.4	8.5	216	15	1/4"
5G-10125	Industrial	Aluminum	5"	5/8"-11	1.0	12,000	0.75"	Lever	Rear	3.95	1.8	11	279	30	3/8"

CUT-OFF TOOLS, BLOW GUN, & ROUTER

5205-2EC

3" Cut-Off Tool, 105°

- Ergonomic and safe use design
- 105° angled head design provides improved sight lines and spark angle
- Tight access use
- 1/16" to 1/4" wheel capability

GENERAL DUTY



15,000 RPM

6812EC

3" Cut-Off Tool

- Lightweight and durable ergonomic composite housing with a soft comfortable grip
- Less noise, vibration, and thermal transfer than aluminum tools
- Protective metal guard

INDUSTRIAL DUTY



20,000 RPM

6191

3" Cut-Off Tool

- Rear exhaust directs exhaust air away
- Lock-off throttle prevents accidental start-up
- For cutting muffler clamps, and use in body shops

INDUSTRIAL DUTY



24,000 RPM

8116

Suction/Blow Gun

- Reversible nozzle ring creates portable vacuum cleaner
- Acts as a blow gun on reverse side
- Includes two nozzles
- Bag included

INDUSTRIAL DUTY



8116

Application	Industrial
Housing	Composite
Capacity	6.3 cfm
Tip Accessories	2
Weight	1 lb / 0.4 kg
Length	5.7" / 144 mm
Air Inlet	1/4"

Model	Application	Housing	Max. Disc Size	Approx. Speed (rpm)	Weight		Length		Air Usage (cfm)	Air Inlet
					lb	kg	in	mm		
5205-2EC	General	Composite	3"	15,000	1.5	0.68	8.25	210	12	1/4"
6812EC	Industrial	Composite	3"	20,000	1.7	0.77	7.38	187	3	1/4"
6191	Industrial	Aluminum	3"	24,000	2	0.9	8	203	10	1/4"

TOOLS FOR THE TIRE INDUSTRY

UG-60S-29

1/4" 0.50 HP Low-Speed Tire Buffer

- Low speed allows for powerful smooth buffing with no burning or scorching of work surface
- Contoured, ergonomic handle
- Rear muffled exhaust
- Includes spanner wrench to tighten collet



UG-65EBL-ASSY

0.60 HP Horizontal Lightweight Tire Buffer

- Rear muffled exhaust
- Designed for medium-sized tire repair
- Excellent with carbide contour or vane wheels up to 2-1/2"
- Four-bearing construction guarantees long life under heavy usage



USG-4VL

0.60 HP Horizontal Tire Buffer


- Lightweight grinder allows one-hand operation
- Quiet rear exhaust and muffler
- For surface preparation work
- Eliminates heavy shaft drag, dramatically reducing operator fatigue



UG-1250LM

1.0 HP Horizontal Tire Buffer

- Piped away rear exhaust muffles sound and eliminates blowing dust
- Governed motor for fast rubber removal using a cup cutter
- Excellent for inside or outside OTR work and truck rim cleanup with wire brush
- Comes with box muffler and piped away exhaust hose

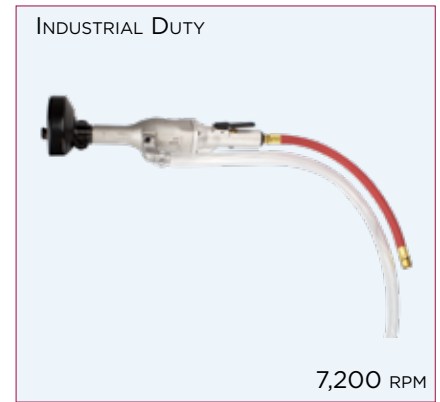

Model	Application	Housing	Collet Size	Capacity (wheel size) in	Approx. Power (hp)	Approx. Speed (rpm)	Throttle Type	Exhaust	Weight		Length		Air Usage (cfm)	Air Inlet
									lb	kg	in	mm		
UG-60S-29	Industrial	Sandcast Aluminum	1/4"	—	0.5	2,900	Lever	Rear	2.3	1.1	8.9	227	18	1/4"
UG-65EBL-ASSY	Industrial	Sandcast Aluminum	—	2.5	0.6	14,600	Lever	Rear	3.1	1.4	10.7	272	22	1/4"
USG-4VL	Industrial	Sandcast Aluminum	—	4	0.6	12,000	Lever	Rear	3.1	1.4	8.7	220	30	1/4"
UG-1250LM	Industrial	Sandcast Aluminum	—	5	1	7,200	Lever	Piped-Away Side	6.2	2.8	17.2	436	32.7	3/8"

ACCESSORIES

ACCESSORIES

*Optimize your
tool's performance*
with Eagle Group's full line
of accessories.

Eagle Group: Your full-service industrial tool source

AUDITOR APTW PRESET TORQUE WRENCHES

Auditor's APTW preset wrenches provide a flexible, easy way to audit fastener torque. A wide range of interchangeable heads provide flexibility and convenience.



- Torque ranges from 5 - 340 Nm
- User friendly, sleek, ergonomic design
- Tactile feedback on achievement of preset torque
- Proprietary adjustment tool guards against unauthorized setting changes
- Wide range of interchangeable heads provide flexibility and convenience
- +/- 3% accuracy when used in clockwise or counterclockwise directions









Wrench Model	Torque Range	Insert Accepted
APTW-25	5 - 25 Nm	12 mm
APTW-50	10 - 50 Nm	12 mm
APTW-100	20 - 100 Nm	12 mm
APTW-150	30 - 150 Nm	12 mm
APTW-200	40 - 200 Nm	14 mm
APTW-340	60 - 340 Nm	14 mm







TORQUE WRENCH INSERTS






Adapters	Description
 APTW-12ADP	9 x 12 M to 14 x 18 F
 APTW-14ADP	14 x 18 M to 9 x 12 F

Ring End Inserts	Description
 APTW-12RE50	1/2" Ring End, 12 mm
 APTW-14RE32	3/2 mm Ring End, 14 mm

Square Drive Inserts	Description
9 x 12	
 APTW-12SD25	1/4" Sq. Dr.
 APTW-12SD38	3/8" Sq. Dr.
 APTW-12SD50	1/2" Sq. Dr.
14 x 18	
 APTW-14SD50	1/2" Sq. Dr.

Blank End Inserts	Description
 APTW-12BLANK	12 mm
 APTW-14BLANK	14 mm

Open End Head Inserts	
	

Ratchet Heads	Description
9 x 12	
 APTW-12RT25	1/4" Sq. Dr.
 APTW-12RT38	3/8" Sq. Dr.
 APTW-12RT50	1/2" Sq. Dr.
14 x 18	
 APTW-14RT50	1/2" Sq. Dr.
 APTW-14RT34	3/4" Sq. Dr.

9 x 12	Size	14 x 18	Size	14 x 18	Size
APTW-12OE7	7 mm OE	APTW-14OE1	1" OE	APTW-14OE30	30 mm OE
APTW-12OE8	8 mm OE	APTW-14OE13	13 mm OE	APTW-14OE32	32 mm OE
APTW-12OE9	9 mm OE	APTW-14OE14	14 mm OE	APTW-14OE34	34 mm OE
APTW-12OE10	10 mm OE	APTW-14OE15	15 mm OE	APTW-14OE36	36 mm OE
APTW-12OE11	11 mm OE	APTW-14OE16	16 mm OE	APTW-14OE38	38 mm OE
APTW-12OE12	12 mm OE	APTW-14OE17	17 mm OE	APTW-14OE41	41 mm OE
APTW-12OE13	13 mm OE	APTW-14OE18	18 mm OE	APTW-14OE118	1-1/8" OE
APTW-12OE14	14 mm OE	APTW-14OE19	19 mm OE,	APTW-14OE138	1-3/8" OE
APTW-12OE15	15 mm OE	APTW-14OE21	21 mm OE		
APTW-12OE16	16 mm OE	APTW-14OE22	22 mm OE		
APTW-12OE17	17 mm OE	APTW-14OE24	24 mm OE		
APTW-12OE18	18 mm OE	APTW-14OE25	25 mm OE		
APTW-12OE19	19 mm OE	APTW-14OE27	27 mm OE		
APTW-12OE20	20 mm OE				
APTW-12OE50	1/2" OE				

AUDITOR TORQUE CUBE



The Auditor Torque Cube (ATC) is a compact, versatile desktop tester that provides a multitude of capabilities. The ATC is designed to test hand or power tools with the following:

- Peak, first peak, and track modes
- Multiple engineering units
- Manual and auto clear function
- Multiple frequency response settings
- Bi-directional use and accuracy
- Accuracy is better than 1% of indicated reading top 90% of range
- Serial data output
- Memory: 999 data samples
- Battery and/or mains powered

Because precision and quality are critical, you can depend on our testers to calibrate and certify your tools. Whether you are assembling large complicated systems or small precise time pieces, AIMCO provides the best system for your application. Our instruments have been judged “best in class” by independent National Standards laboratories. Auditor Torque Cube is rugged enough to test and verify tools at “point of use” while still being accurate enough to calibrate hand and power tools.

Each tester is shipped with a mains/battery charger power cord, a hex to allen drive bit, and a bolting template. Models with max torque of 1,000 in-lb or less also include a joint rundown fixture. The ATC can be positioned vertically or horizontally for the ergonomic testing of inline or pistol grip tools.

Model	Recommended Torque Range		Weight		W x H x D		Sq. Dr.
	Nm	in-lb/ft-lb	kg	lb	mm	in	
Vertical Configuration							
ATC-10	0.13 - 1.13	1 - 10 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4"
ATC-25	0.28 - 2.83	2.5 - 25 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4"
ATC-100	1.13 - 11.3	10 - 100 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4"
ATC-250	2.83 - 28.3	25 - 250 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	3/8"
Horizontal Configuration							
ATC-150F	20 - 200	15 - 150 ft-lb	2.25	5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/2"

AUDITOR AUET TORQUE TESTERS



AUET



AUET/MTM



AUET/MTM-DC

AUDITOR UNIVERSAL ELECTRONIC TORQUE TESTERS

Auditor Universal Electronic Testers (AUET) have a broad range of features to accommodate most requirements. They are designed to be bench-top mounted and are available in several configurations and various single or multiple torque ranges. Onboard memory allows you to capture 999 torque event readings. The testers are also available in file capability (DC) models that require PC software Auditor Tool Manager (ATM).

Instruments up to 1,000 in-lb are supplied with rundown adapters/joint kits. Rundown kits for larger instruments can be ordered separately. AUET/MTM units are supplied with an external transducer port and selector switch for connecting additional transducers.

AUET testers utilize the same transducers as the ATC instruments, providing the same high quality accuracy and durability. The common interface makes the Auditor tester extremely user friendly.

Single Transducer Models

Model*	Recommended Torque Range
AUET-050(-DC)	5 - 50 in-oz / 0.4 - 3.6 kgf-cm
AUET-0100(-DC)	10 - 100 in-oz / 0.7 - 7.2 kgf-cm
AUET-10(-DC)	1 - 10 in-lb / 1.1 - 11.5 kgf-cm
AUET-50(-DC)	5 - 50 in-lb / 0.5 - 5.6 Nm
AUET-100(-DC)	10 - 100 in-lb / 1.1 - 11.3 Nm
AUET-250(-DC)	25 - 250 in-lb / 2.8 - 28.3 Nm
AUET-500(-DC)	50 - 500 in-lb / 5.7 - 56.5 Nm

* Add "-DC" to part numbers for data collecting models.

Data collecting models allow multiple files/tools/applications to be associated with torque data. Requires Tool Manager software.

Custom sizes are also available. Contact an Eagle Group Customer Service Associate for ordering options, (503) 254-6600, or toll free (800) 852-1368.

Dual Transducer Models

Model*	Recommended Torque Range	
	Transducer 1	Transducer 2
AUET/MTM-050-25	5 - 50 in-oz / 0.04 - 0.4 Nm	2.5 - 25 in-lb / 0.3 - 2.8 Nm
AUET/MTM-050-600(-DC)	5 - 50 in-oz / 0.04 - 0.4 Nm	60 - 600 in-lb / 6.8 - 67.8 Nm
AUET/MTM-0100-050(-DC)	10 - 100 in-oz / 0.07 - 0.71 Nm	5 - 50 in-oz / 0.04 - 0.4 Nm
AUET/MTM-10-100(-DC)	1 - 10 in-lb / 0.11 - 1.12 Nm	10 - 100 in-lb / 1.3 - 11.3 Nm
AUET/MTM-50-250(-DC)	5 - 50 in-lb / 0.56 - 5.65 Nm	25 - 250 in-lb / 2.8 - 28.3 Nm
AUET/MTM-50-500(-DC)	5 - 50 in-lb / 0.56 - 5.65 Nm	50 - 500 in-lb / 5.7 - 56.5 Nm

* Add "-DC" to part numbers for data collecting models.

Data collecting models allow multiple files/tools/applications to be associated with torque data. Requires Tool Manager software.

Custom sizes are also available. Contact an Eagle Group Customer Service Associate for ordering options, (503) 254-6600, or toll free (800) 852-1368.

RUNDOWN FIXTURES



AUDITOR ARDIA RUNDOWN FIXTURES

To test power tools, pneumatic or electric, consistent rotational speed must be achieved. The joint rundown fixture/simulator provides the means by which the tool motor and spindle rotates freely at the start of the test cycle and then develops torque as rotation resistance increases as fastener/joint load increases. The linearity and consistency of the joint rundown fixtures/simulators vary greatly and the tool test data is a product of the variations in these rundown fixtures. Higher quality joint rundown fixtures produce torque data with less scatter.

- Enables accurate and repeatable testing of pneumatic or electric power tools
- Mechanical Belleville system of bolt, nut or nut body, Belleville washers and main housing
- Fixtures can be ordered to simulate hard, medium, or soft joints

ARDIA Models

Model*	Recommended Torque Range		Sq. Dr.
	Nm	in-lb	
ARDIA-10	0.13 - 1.13	1 - 10	1/4"
ARDIA-25	0.28 - 2.8	2.5 - 25	1/4"
ARDIA-50	0.56 - 5.6	5 - 50	1/4"
ARDIA-100	1.3 - 11.3	10 - 100	1/4"
ARDIA-150	1.7 - 16.9	15 - 150	1/4"
ARDIA-250	2.8 - 28.3	25 - 250	3/8"
ARDIA-350	4 - 40	35 - 350	3/8"
ARDIA-500	5.6 - 56.5	50 - 500	3/8"
ARDIA-750	8.5 - 84.7	75 - 750	3/8"
ARDIA-1000	11.3 - 1,000	100 - 113	3/8"

*Add "HD" to part numbers for wear resistant models. Add "HDS" to part numbers for fully encapsulated wear resistant models. Add "HDE" to part numbers for partial encapsulated wear-resistant models.

ARDIA Rundown Fixture connected to an AIMCO AISI transducer.



ERGO-ARM TOOL SUPPORT SYSTEMS

Ergo Arm Series torque reaction arms reduce operator fatigue by absorbing torque transfer from the tool to the operator. Optional tool mounts are available for pistol grip and angle style tools. They are available in single or parallel configurations. Parallel configurations maintain tool perpendicularity to the work piece throughout tool travel. By providing ergonomic support, Ergo-Arms increase productivity, consistency, and accuracy.



AD-D1098-PAC



AAAD-D1098-SAC

PARALLEL ARM SERIES

AD-D1098-P, AD-D1098-PAC, AD-D1098-PACE

- Allows for freedom of movement
- Vertical adjustment eliminates cross-threading
- Fixtured tool increases repeatability
- Adjustable reach
- Available in air or oil cylinder models
- Electric tool mount standard on PACE model

SINGLE ARM SERIES

AD-D1098-S, AD-D1098-SAC

- Full tool rotation
- Allows for freedom of movement
- Adjustable reach
- Compatible with automatic screw feeder
- Available in air or oil cylinder models


Model*	Arm Style	Tool Mount	Reach		Capacity		Max. Torque*	
			in	mm	lb	kg	in-lb	Nm
AIR CYLINDER SERIES								
AD-D1098-SAC	Single	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PAC	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PACE	Parallel	Electric	4 - 33	102 - 838	0 - 15	0 - 7	110	12
OIL CYLINDER SERIES								
AD-D1098-S	Single	Air manifold**	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-P	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12

* Max torque allowed may be dependent on tool clutch type and joint rate

** For single arm electric tool mount, order EAP-202ED-KIT

SPECIAL FEATURES OF CLASSIC STYLE ERGO-ARM

Dual ball bearing joint construction for smoother movement and long life

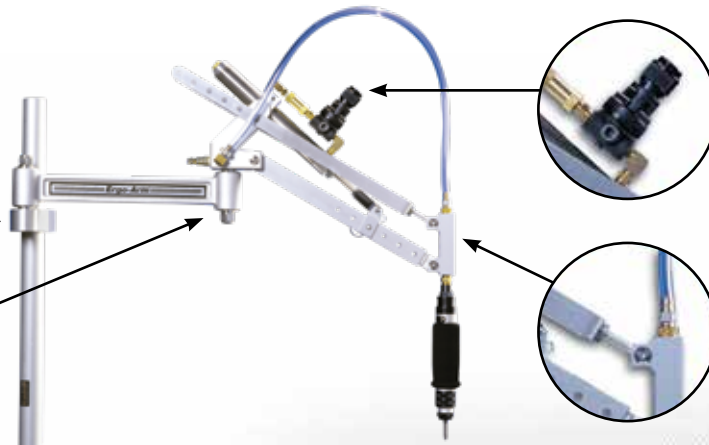

Air regulator offers precision adjustment of resistance for perfect balance



Unique upper rail adjustment allows true vertical approach to any fastener — no cross-threading



ERGO-ARM ACCESSORIES & LINEAR ARM

ERGO-ARM ACCESSORIES

- End-of-Arm Tooling options for the Ergo-Arm allow you to choose the style right for your application
- Tool holders permit the tool to swivel, rotate, swing, or twist. Heavy-duty construction can lock out any single, or combination of rotating, actions allowing only the motions required by your application
- End-of-Arm Tooling Brackets are simple to use. One Ergo-Arm can be used for more than one application

For use with models AD-D1098-S/SAC



EAP-202ED-KIT
Electric Driver Tool Mount Kit

For use with models AD-D1098-P/PAC



EAP-203-ASSY
Air Manifold Tool Mount Kit (Standard on parallel units)



EAP-202ASSY
Driver Tool Mount

Parallel Arm Kit



EAA-04
Provides easy conversion of standard Ergo-Arms to the parallel style.

ALA & AFA SERIES LINEAR ARMS

Ergonomic support for electric and pneumatic tools reduces operator fatigue

The ALA Series (AIMCO Linear Arm) is constructed with precision linear slides and bearings for precise tool movements. The AFA Series (AIMCO Folding Arm) is configured with aluminum alloy beams connected by an elbow joint for working with tools in tight spaces.



ALA Series



AFA Series with folding arm

ALA Series

- Constructed of lightweight aluminum
- Improves fastening quality and productivity
- Maintains perpendicularity of the tool to the application
- Absorbs torque reaction
- Counterbalances tool mass

AFA Series

- Includes all the features of the ALA Series
- Folding elbow joint allows for closer reach to post for tight workspaces


Model*	Max Torque		Max Tool Weight		Reach		Tool Diameter		
	Nm	ft-lb	kg	lb	mm	in	mm	in	
ALA SERIES LINEAR ARM									
ALA5-200	5	3.7	2	4.4	317 - 519	12.5 - 20.4	23 - 40	1.0 - 1.6	
ALA15-200	15	11.1	3	6.6	317 - 519	12.5 - 20.4	23 - 40	1.0 - 1.6	
ALA10-400	10	7.4	2	4.4	517 - 919	20.4 - 36.2	23 - 40	1.0 - 1.6	
ALA40-300	40	29.5	3	6.6	417 - 719	16.4 - 28.3	32 - 47	1.3 - 1.9	
ALA200-400	200	147.5	10	22	517 - 919	20.4 - 36.2			
ALA400-400	400	295	20	44	517 - 919	20.4 - 36.2			
AFA SERIES WITH FOLDING ARM									
AFA5-400	5	3.7	2	4.4	0 - 470	0 - 18.5	23 - 40	1.0 - 1.6	
AFA15-400	15	11.1	3	6.6	0 - 470	0 - 18.5	23 - 40	1.0 - 1.6	
AFA10-550	10	7.4	2	4.4	0 - 620	0 - 24.2	23 - 40	1.0 - 1.6	

WORKSTATION COMPONENTS & ASSEMBLIES



COMPONENTS

TRACK

Steel with beige polyester finish. Use for vertical and horizontal workstation support.



Part #	Length
30# Track	
AT3-3	3 ft track
AT3-4	4 ft track
AT3-6	6 ft track
AT3-9*	9 ft track
50# Track	
AT5-3	3 ft track
AT5-4	4 ft track
AT5-6	6 ft track
AT5-9*	9 ft track
AT5-12*	12 ft track



TRACK NUT (ATN-3/5)

Zinc plated steel. Use to attach accessories to track, as end stops, or to isolate rolling accessories.


- ATN-3 for 30 lb. track
- ATN-5 for 50 lb. track



END STOP (AES-3/5)


Zinc oxide finish. Use to prevent balancer trolley from "overtraveling" horizontal track.

- AES-3 for 30 lb. track
- AES-5 for 50 lb. track



MOUNTING PLATE (AMP-5)

Black polyester finish. Use as a base to mount vertical uprights.



END CAP (AEP-3/5)

Black molded vinyl. Use to cap track ends for a professional finish.


- AEP-3 for 30 lb. track
- AEP-5 for 50 lb. track



ANGLE BRACKET (AB-3/5)

Black polyester finish. Use to mount horizontal track to vertical track.


- AB-3 for 30 lb. track
- AB-5 for 50 lb. track



JOINT HANGER BRACKET (AJH-3/5)

Black polyester finish. Use to couple and hang end-to-end track.


- AJH-3 for 30 lb. track
- AJH-5 for 50 lb. track



BALANCER TROLLEY (ABT-3/5)

Black polyester finish. Use as moving support for tool balancers, hose, and cable. Quality ball bearing wheels for long life and smooth tracking.


- ABT-3 for 30 lb track (1.00 dia)
- ABT-5 for 50 lb track (1.25 dia)



HANGER BRACKET (AHB-3/5)

Black polyester finish. Use to suspend track at right angle.

- AHB-3 for 30 lb. track
- AHB-5 for 50 lb. track



VERTICAL COLUMN (AVC-5*)

Beige polyester finish, 3" diameter x 9 ft upright steel column with welded base.


Use as floor mount for extra stability with jibs or workstation components.



HOSE/CABLE TROLLEY


Black polyester finish. Use for moving cable or hose festoon. Supports hose cable OD .60-.94.

- AIC5-2 for 50 lb. track



U-BOLTS (AUB-5)


Zinc plated steel. Use to secure boom bracket, or any flat metal plate, to AVC-5 (sold individually).



SUPPORT CLAMPS (ASC-3/5)

Black polyester finish. Use as additional support for track.

- ASC-3 for 30 lb. track
- ASC-5 for 50 lb. track




TOOL CLIP (SH-5)

Steel clip with safety latch. Use for tool attachment and as replacement clip for lightweight tool balancers. Length: 2.37"



90° CONNECTOR FOR 3/8" HOSE (WSCH)

3/8" I.D. Brass. Use to provide stable transfer point from air line to tool. 90 degree connector attaches to ABT-5.




WALL AND FLOOR MOUNTED JIBS

3 FT. SWINGING JIB (AW3S)

3 FT. FIXED JIB (AW3F)

3 FT. SWINGING JIB FOR CHANNEL MOUNT (AJS3**)

Jibs are mounted to wall or beams to create free standing workstations. End stop, end cap, and balancer trolley included. Maximum weight: 30 lb.

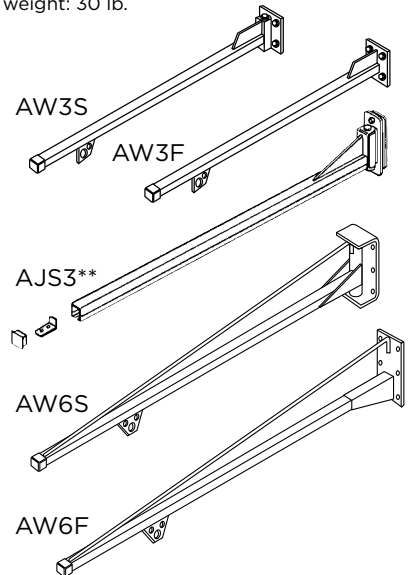

6 FT. SWINGING JIB (AW6S)

6 FT. FIXED JIB (AW6F)

Jibs can be wall mounted or attached to vertical column (AVC-5) to create a freestanding workstation. End stop, end caps, and balancer trolley are included. Maximum weight: 50 lb.

All complete assemblies are beige polyester finish and include balancer trolley, end caps, and end stops. Floor mounted assemblies are not able to ship via UPS.

When choosing a workstation system, remember...


Total weight capacities should include tool balancer, hose/cable, and tool/fixture. Units need to be supported vertically and horizontally every 6 ft.

** Additional freight may apply

** AJS3 Does not include balancer trolley


WORKSTATION COMPONENTS & ASSEMBLIES

**FLOOR MOUNTED
3 FT. FIXED JIB*
(AW3FMF)**
Maximum weight: 30 lb
Column height: 6 ft

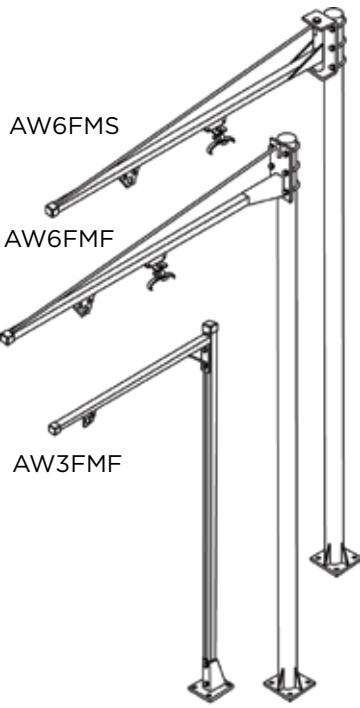


AW6FMS

**FLOOR MOUNTED
6 FT. SWINGING
JIB* (AW6FMS)**

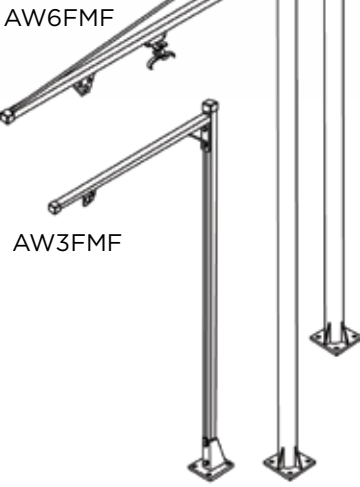

AW6FMF

**FLOOR MOUNTED
6 FT. FIXED JIB*
(AW6FMF)**
Maximum weight: 50 lb
Column height: 9 ft

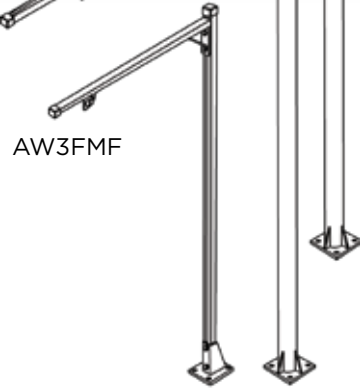

AW3FMF

*Units include end stop, balancer trolley and intermediate carrier.

**BENCH MOUNTED
SWINGING JIB (JJ30-S)**




JJ30-S

**BENCH MOUNTED
FIXED JIB (JJ30)**
Maximum weight: 30 lb
Column height: 48" including mounting plate
3 ft. swinging jib includes balancer trolley, end stop, and cap

AIMCO WORKSTATION KIT

**BENCH MOUNTED WORKSTATION
WITH TORQUE ARM (JJ30-TA**)**

- 5 lb. maximum weight (RPA-3 included)
- 5' column height including mounting plate
- 38" jib length (swinging)
- 15 ft-lb torque rating
- 3/8" NPT inlet
- 1/4" NPT outlet
- Beige polyester finish
- 1/4" braided air hose
- 21" maximum vertical arm travel

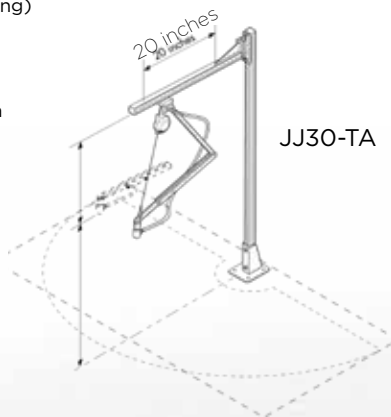

JJ30-TA

** Additional freight may apply
** For use with pneumatic tools only

CREATE A CUSTOM SUPPORT SYSTEM

- Organize work area to create a safe, productive working environment
- Reduce risk of injury to assembler by providing support for heavy tools
- Protect valuable tools, fixtures, and monitoring devices from damage by suspending them out of the way


AIMCO BASIC WORKSTATION KIT (ATW-50)



- 50 lb maximum weight capacity
- 48" uprights
- 36" extensions
- Table mounts included
- 6' tool rail with rolling trolley included
- All necessary hardware included

TROLLEY MOUNTED TORQUE ARM WITH 3-LB RETRACTOR AND HOSE (FA-50-2*)

Ergonomic arm absorbs torque reaction. Moves front to back along overhead jib.



(TA-50-2)
Moves side to side on overhead track.



TOOL BASKET (21226)
Mounts easily to any work area to hold pistol and angle style tools.

Eagle Group can customize a workstation for you.
Contact an Eagle Group Customer Service Associate (503) 254-6600, or toll free (800) 852-1368.

BALANCERS & RETRACTORS

TW SERIES BALANCERS

TW-0 and TW-00

- Gravity defying / “true balance”
- No tension buildup to cause worker fatigue
- Easy external direct drive tensioning
- 360° upper swivel
- Safety cable provision
- Tool clip included

TW-3 through TW-70

- Tapered drum allows “true balance” throughout cable travel
- Easy external direct drive tensioning
- Cast aluminum casing for durability
- Permanent lubrication
- 360° top swivel
- Enclosed spiral spring for added safety
- Safety chain provision (TW-3 through TW-15 models)
- Automatic safety lock plus manual drum lock (TW-22 through TW-70)



Model	Capacity		Anti-Gravity Capacity (lb)	Cable
	lb	kg		
TW-00	1.1 - 3.3	0.5 - 1.5	2.5 - 3	18" stranded steel cable 1/8 dia.
TW-0	1.1 - 3.3	0.5 - 1.5	2.5 - 3	3.3-ft stranded steel cable 1/8" dia..
TW-3	2.2 - 6.6	1 - 3	4.5 - 6	4.3-ft stranded steel cable 5/32" dia.
TW-5	5.5 - 11	2.5 - 5	8 - 10.5	4.3-ft stranded steel cable 5/32" dia.
TW-9	9.9 - 19.8	4.5 - 9	15 - 19	4.3-ft stranded steel cable 5/32" dia.
TW-15	19.8 - 33	9 - 15	26 - 32.5	4.3-ft stranded steel cable 5/32" dia.
TW-22	33 - 48.4	15 - 22	41 - 48	5-ft stranded steel cable 3/16" dia.
TW-30	48.4 - 66	22 - 30	58 - 65.5	5-ft stranded steel cable 3/16" dia.
TW-40	66 - 88	30 - 40	77.5 - 87.5	5-ft stranded steel cable 3/16" dia.
TW-50	88 - 110	40 - 50	100 - 109.5	5-ft stranded steel cable 3/16" dia.
TW-60	110 - 132	50 - 60	122 - 131	5-ft stranded steel cable 3/16" dia.
TW-70	132 - 154	60 - 70	144 - 153	5-ft stranded steel cable 3/16" dia.

RETRACTORS

RPA Series

- No tools needed to set tension
- 5 ft nylon coated steel cable
- Adjustable cable stop
- Tool clip included
- Model series supports weight range 0.5 - 5 lb
- Reinforced hanging bracket includes safety cable provision



RMA-L Series

- Steel housing with polyester finish
- Ratchet cable lock
- Permanently lubricated
- Tool clip included
- External tension adjustment
- Reinforced hanging bracket includes safety cable provision
- 8 ft of 3/32" diameter coated steel cable



Model	Capacity
RPA-1	0.5 - 1.5 lb 0.2 - 0.7 kg
RPA-2	1.5 - 3 lb 0.7 - 1.4 kg
RPA-3	3 - 5 lb 1.4 - 2.3 kg
RMA-7L	5 - 10 lb* 2.3 - 4.8 kg*
RMA-15L	10 - 15 lb* 4.5 - 6.8 kg*
RMA-20L	15 - 23 lb* 6.8 - 10.4 kg*

* With ratchet lock

ASB-SERIES BALANCERS

- **Built-in Safety Features:** The cable, drum, and enclosed spring are fully visible without opening the unit for easy and convenient safety checks. The sturdy spiral spring is enclosed for greater control and safety
- **Ergonomic Spring Release:** The automatic safety lock provides extra control
- **Extended Cable Length:** Stainless steel cables allow for extended reach on applications
- **Enhanced Gear Mechanism:** Allows for more exact adjustment of tension
- **No Recoil and Low Resistance:** Tapered drum style provides gravity defying tool positioning and low travel




ASB-OC Gravity Defying and Hand Adjustable Balancer



ASB-3C
ASB-5C

Model	Capacity		Stroke		Weight	
	lb	kg	in	cm	lb	kg
ASB-OC	1.1 - 3.3	0.5 - 1.5	51.1	130	1.5	0.7
ASB-3C	3.3 - 6.6	1.5 - 3	86.4	220	3.0	1.4
ASB-5C	5.5 - 11	2.5 - 5	86.4	220	3.4	1.5

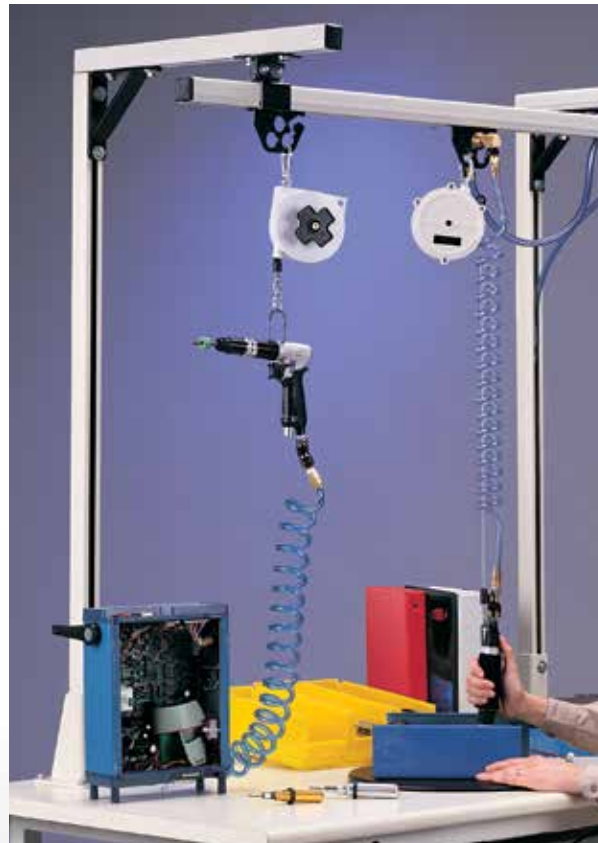

FRL FILTER/REGULATORS

AFRL STACKING FILTERS/REGULATORS

Stacking filter/regulator combinations provide air filtration and precise regulation in a single unit for easy mounting and installation.

- All models include L-mount bracket, gauge, and metal bowl shields
- Polycarbonate filter and lubricator bowls (metal bowls standard on AFRL-8)
- 25-micron filter included on all models
- Regulating range: 7 - 125 PSI
- Custom order upgrade items include metal bowl, 5 micron filter, semi-automatic filter drain, and reduced PSI range regulator. Contact an Eagle Group Customer Service Associate for more information, (503) 254-6600, or toll free (800) 852-1368
- Maximum allowable Input Pressure not to exceed 120 PSI




AFRL-2-C
AFRL-3-C



AFRL-2
AFRL-3
AFRL-4
AFRL-8

Model	Port	Gauge Port	Flow Rate		Bowl Shield
			CFM	l/min	
AFRL-2	1/4"	1/8"	70	2,000	yes
AFRL-2-C	1/4"	1/8"	60	1,700	yes
AFRL-3	3/8"	1/4"	140	4,000	yes
AFRL-3-C	3/8"	1/4"	105	3,000	yes
AFRL-4	1/2"	1/4"	140	4,000	yes
AFRL-8	1"	1/4"	180	5,000	yes

Dimensions

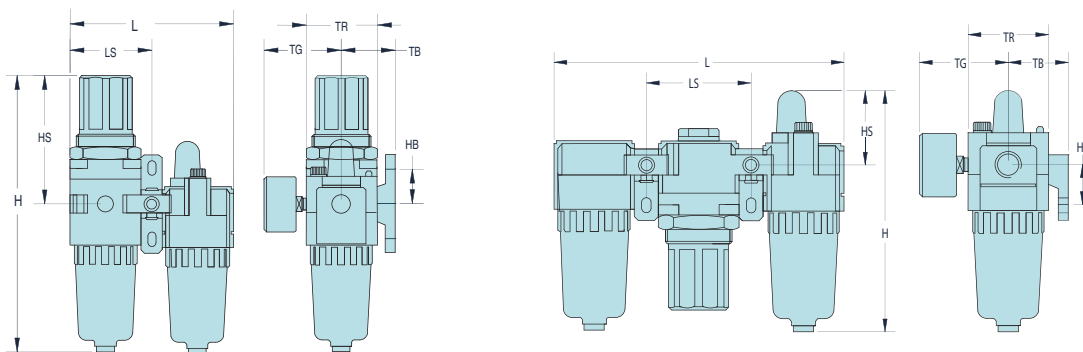


Model	H in/mm	HB in/mm	HS in/mm	L in/mm	LS in/mm	TB in/mm	TG in/mm	TR in/mm
AFRL-2	6.16 (156.5)	1.39 (35.3)	1.50 (38.1)	7.13 (181.1)	2.52 (64)	1.61 (41)	2.39 (60.7)	2.09 (53.1)
AFRL-2-C	8.31 (211.1)	1.38 (35.1)	3.64 (92.5)	4.61 (117.1)	2.30 (58.4)	1.61 (40.9)	2.39 (60.7)	2.09 (53.1)
AFRL-3	7.54 (191.5)	1.57 (40)	1.61 (40.9)	9.37 (238)	3.31 (84.1)	1.97 (50)	2.58 (65.5)	2.76 (70.1)
AFRL-3-C	10.31 (261.9)	1.57 (39.9)	4.41 (112)	6.06 (153.9)	3.03 (77)	1.97 (50)	2.58 (65.5)	2.76 (70.1)
AFRL-4	7.54 (191.5)	1.57 (40)	1.61 (40.9)	9.37 (238)	3.31 (84.1)	1.97 (50)	2.58 (65.5)	2.76 (70.1)
AFRL-8	10.69 (271.5)	1.97 (50)	1.89 (48)	11.81 (300)	4.13 (104.9)	2.75 (69.9)	2.97 (75.4)	3.54 (89.9)

AIR LINE ACCESSORIES

POLYURETHANE AIR HOSE

Single Air Hose Assemblies (Coiled)

- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104° F to 175° F

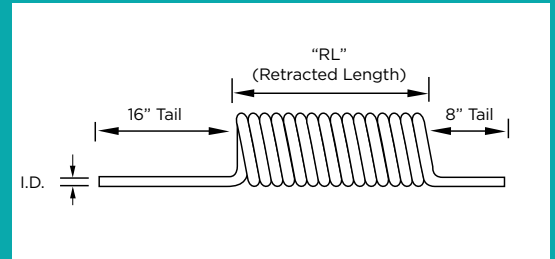

Model	Size (O.D. x I.D. x Length)	Retracted Length	Working Pressure	NPT Fittings
ASH-250C-10MSZ	3/8" x 1/4" x 10'	7"	100 psi	1/4"
ASH-250C-15MSZ	3/8" x 1/4" x 15'	9-1/2"	100 psi	1/4"
ASH-250C-25MSZ	3/8" x 1/4" x 25'	15-1/2"	100 psi	1/4"
ASH-375C-15MSZ	9/16" x 3/8" x 15'	10"	100 psi	3/8"
ASH-375C-25MSZ	9/16" x 3/8" x 25'	14"	100 psi	3/8"
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	100 psi	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	100 psi	1/2"

Custom length coil assemblies and special colors available in minimum order quantities. Contact an Eagle Group Customer Service Associate, (503) 254-6600, or toll free (800) 852-1368.

Straight Air Hose

- Sold per foot
- For full-reel pricing, contact an Eagle Group Customer Service Associate, (503) 254-6600, or toll free (800) 852-1368.



Model	I.D.
ASH-375Z	3/8"
ASH-500Z	1/2"

>> ACCESSORIES

RUBBER HOSE

- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40° F to 190° F



I.D.	O.D.	Length	Working Pressure	Weight
3/16"	0.44"	10 ft	200 psi	0.8 lb
1/4"	0.5"	10 ft	200 psi	0.9 lb
5/16"	0.58"	10 ft	200 psi	1.2 lb
3/8"	0.67"	10 ft	200 psi	1.5 lb
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an Eagle Group Customer Service Associate, (503) 254-6600, or toll free (800) 852-1368.

AIR LINE ACCESSORIES

BRASS QUICK COUPLERS

Manual ball couplers designed for use with ergonomic twist plugs. Brass with nitrile seals, rated to 300 PSI, from -40° to +250° F.

Model	Description
B23	1/4" NPT F x 1/4" QC
B23E	1/4" NPT F x 3/8" QC
B25	3/8" NPT F x 3/8" QC



MINI AIR GAUGE SWIVEL JOINT KITS

- Bi-directional 360° rotation
- Keeps air hose straight and untwisted
- Decreases operator fatigue



Model	Inlet	Weight	Max PSI	Tool CFM
7021AG	1/4" NPT	3 oz	Up to 125	25
7041AG	3/8" NPT	3 oz	Up to 125	50

SWIVEL AIR FITTINGS

For use with most portable air tools, including grinders, drills, screwdrivers, buffers, sanders, staple guns, and more. Rotates 360° for awkward angles.




Model	Inlet	Weight	Max PSI	Tool CFM
7021	1/4" NPT	3 oz	Up to 125	25
7041A	3/8" NPT	11 oz	Up to 125	50
7051	1/2" NPT	7 oz	Up to 125	60

ERGONOMIC TWIST PLUGS




These unique, ergonomically designed hose fittings provide 360° rotation and 35° angled rotation in any direction.

- Two rotation points prevent kinking of air hose
- Design ensures full air pressure flow
- Rotating joint has polyurethane dust cover
- Heavy-duty construction

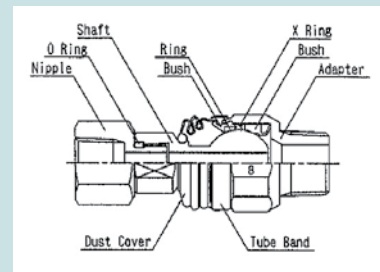

Model	Description
TS-30NP-2NPT	3/8" NPT Female x 1/4" NPT Male
TS-20NP-2NPT	1/4" NPT Female x 1/4" NPT Male
TS-20US-2NPT	1/4" US Plug x 1/4" NPT Male
TS-30US-3NPT	3/8" US Plug x 3/8" NPT Male

AIR LINE FITTINGS

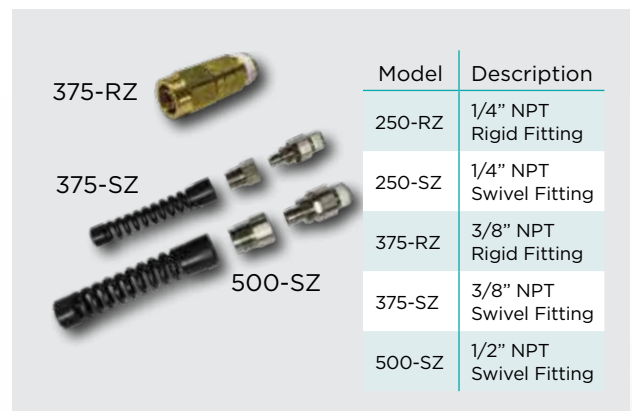

Model	Description
375-RZ	1/4" NPT Rigid Fitting
250-RZ	1/4" NPT Swivel Fitting
375-SZ	3/8" NPT Rigid Fitting
375-SZ	3/8" NPT Swivel Fitting
500-SZ	1/2" NPT Swivel Fitting

BITS & SOCKETS

STANDARD FASTENER TOOLS

Connect your tool to the application with Bits, Sockets, and Nutsetters from AIMCO.


AIMCO has assembled a complete package of commonly used screwdriver bits and nutsetters. Our goal is to supply you with the highest quality bits and nutsetters for your fastener needs. Whether you're in electronics, aerospace, automotive, or general industry, AIMCO has the bits and nutsetters to fit your needs.

MAG-O-NETS: A REVOLUTIONARY WAY TO CONVERT STANDARD BITS TO MAGNETIC BITS



- Easy, cost effective alternative to traditional magnetic bit holder and insert bit combination
- Improves torque transfer by eliminating "wobble effect"
- Easily adjust magnetic attraction by moving Mag-O-Net collar closer to or further from fastener
- Fits virtually any standard screwdriver bit
- Reusable and interchangeable — once a bit is worn out, simply remove your Mag-O-Net and slide it onto the next bit
- Lifetime guarantee on magnetic attraction




Part #	ID	OD	L
AM1/4Z	7 mm	19 mm	10 mm
AM5Z	6 mm	17.5 mm	10 mm
AM3/16Z	3/16 in	17.5 mm	10 mm
AM5/16Z	5/16 in	10 mm	10 mm



MARKER SOCKETS


Marker Sockets paint the bolt head at the same time the torque is checked. Sockets are designed to your specification.

- Unit consists of a marker socket, an ink cartridge, a spring, and the cartridge cap
- Cartridge can be inserted/taken off easily for ink management
- Easily replaceable paint point
- Can be used with either oil-based or water-based inks
- When ordering, provide dimensions shown. To order, contact an Eagle Group Customer Service Associate (503) 254-6600, or toll free (800) 852-1368



BITS & SOCKETS

IMPACT SOCKETS

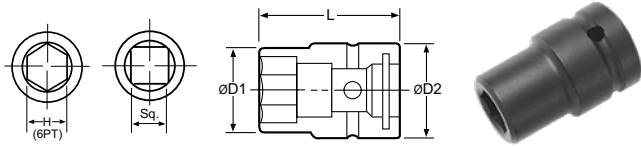

Part #	Hex	D1		D2		L	
		mm	in	mm	in	mm	in

3/8" Square Drive							
METRIC SAE	A31/4	1/4"	10	0.39	19	0.75	34 1.34
	A35/16	5/16"	12	0.47	19	0.75	34 1.34
	A33/8	3/8"	15	0.59	19	0.75	34 1.34
	A306	6 mm	10	0.39	19	0.75	34 1.34
	A307	7 mm	13	0.49	20	0.79	32 1.26
	A308	8 mm	14	0.55	20	0.79	32 1.26

3/8" Square Drive, Deep							
	A307-2	7 mm	13	0.49	20	0.79	50 1.97
	A307-2.75	7 mm	13	0.49	20	0.79	70 2.76
	A308-2	8 mm	14	0.55	20	0.79	50 1.97

3/8" Square Drive, Magnetic							
METRIC SAE	A31/4MP	1/4"	10	0.39	19	0.75	34 1.34
	A35/16MP	5/16"	12	0.47	19	0.75	34 1.34
	A33/8MP	3/8"	15	0.59	19	0.75	34 1.34
	A308MP	8 mm	14	0.55	20	0.79	32 1.26
	A310MP	10 mm	17	0.65	20	0.79	32 1.26
	A311MP	11 mm	17	0.65	19	0.75	34 1.34

1/2" Square Drive							
METRIC SAE	A43/8	3/8"	16	0.63	25	0.98	38 1.50
	A47/16	7/16"	18	0.69	25	0.98	38 1.50
	A41/2	1/2"	19	0.75	25	0.98	50 1.97
	A408	8 mm	16	0.61	25	0.98	40 1.58
	A409	9 mm	16	0.63	25	0.98	40 1.58
	A410	10 mm	18	0.69	25	0.98	40 1.58

Part #	Hex	D1		D2		L	
		mm	in	mm	in	mm	in

1/2" Square Drive, Deep							
METRIC SAE	A43/8-3.25	3/8"	17	0.67	25	0.98	82 3.23
	A47/16-3.25	7/16"	19	0.73	25	0.98	82 3.23
	A41/2-3.25	1/2"	22	0.85	25	0.98	82 3.23
	A410-2	10 mm	18	0.69	25	0.98	50 1.97
	A410-3	10 mm	18	0.69	25	0.98	75 2.95
	A411-3.25	11 mm	19	0.73	25	0.98	82 3.23

1/2" Square Drive, Magnetic							
	A408MP	8 mm	16	0.61	25	0.98	40 1.58
	A410MP	10 mm	18	0.69	25	0.98	40 1.58
	A412MP	12 mm	21	0.81	25	0.98	40 1.58

3/4" Square Drive							
METRIC SAE	A611/16	11/16"	30	1.18	44	1.73	50 1.97
	A63/4	3/4"	32	1.26	44	1.73	50 1.97
	A613/16	13/16"	35	1.38	44	1.73	50 1.97
METRIC SAE	A614	14 mm	24	0.95	38	1.50	55 2.17
	A616	16 mm	27	1.06	44	1.73	50 1.97
	A617	17 mm	30	1.18	38	1.50	55 2.17

3/4" Square Drive, Deep							
METRIC SAE	A611/16-4	11/16"	31	1.22	44	1.73	100 3.94
	A63/4-4	3/4"	33	1.30	44	1.73	100 3.94
	A613/16-4	13/16"	36	1.42	44	1.73	100 3.94
METRIC SAE	A617-4	17 mm	31	1.22	44	1.73	100 3.94
	A618-4	18 mm	32	1.26	44	1.73	100 3.94
	A619-4	19 mm	33	1.30	38	1.50	100 3.94

1" Square Drive							
METRIC SAE	A87/8	7/8"	37	1.46	54	2.13	59 2.32
	A815/16	15/16"	38	1.50	54	2.13	59 2.32
	A81	1"	41	1.61	54	2.13	59 2.32
	A817	17 mm	31	1.22	50	1.97	63 2.48
	A819	19 mm	33	1.30	50	1.97	63 2.48
	A821	21 mm	37	1.46	50	1.97	63 2.48

ANTI-MARRING SOCKETS

AIMCO's anti-marring sockets have a protective resin cover that spins freely, preventing damage to application surfaces, and protecting fingers.

To order sockets specific to your application, contact an Eagle Group Customer Service Associate (503) 254-6600, or toll free (800) 852-1368



CV Series



CVF Series




CVF Series with Bit Attachment



BITS & SOCKETS

Allen Sockets



Part #	Hex	L1		L	
		mm	in	mm	in


3/8" Square Drive

A31/4C	1/4"	10	0.39	42	1.65
A304C	4 mm	10	0.39	42	1.65

1/2" Square Drive

A41/4C	1/4"	25	0.98	50	1.97
A405C	5 mm	25	0.98	50	1.97

Universal Sockets

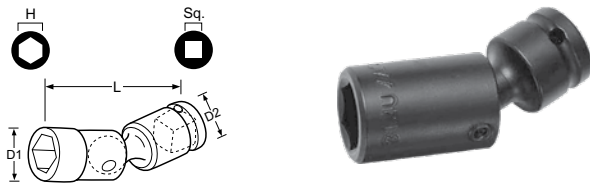

Part #	Hex	D1		D2		L	
		mm	in	mm	in	mm	in


3/8" Square Drive

A310U	10 mm	16	0.63	20	0.79	55	2.17
A311U	11 mm	16	0.63	20	0.79	60	2.36

1/2" Square Drive

A412U	12 mm	20.5	0.81	25	0.98	70	2.76
A413U	13 mm	19	0.75	24	0.95	70	2.76

Extensions




Part #	Sq. Drive		L		D	
	Hex	mm	mm	in	mm	in
A375E	3/8"	75	2.95	20	0.79	
A405E	1/2"	51	2.01	30	1.18	
A610E	3/4"	100	3.94	44	1.73	
A810E	1"	102	4.02	54	2.13	
A1220E	1-1/4"	200	7.87	60	2.36	
A1418E	1-1/2"	178	7.01	84	3.31	
A2426E	2-1/2"	264	10.39	137	5.39	

Socket Adapters



Part #	Female	Male	D		L	
	Sq. Drive	Sq. Drive	mm	in	mm	in
A302A	3/8"	1/4"	22	0.87	35	1.38
A403A	1/2"	3/8"	25	0.98	37	1.46
A504A	5/8"	1/2"	35	1.38	47	1.46
A604A	3/4"	1/2"	38	1.50	53	2.09
A806A	1"	3/4"	50	1.97	70	2.76
A128A	1-1/4"	1"	60	2.36	76	2.99
A#508A	Spline #5	1"	60	2.36	90	3.54


Nutsetters

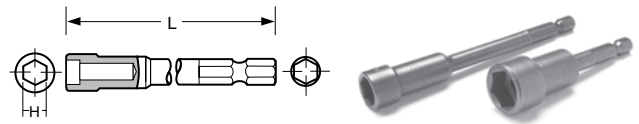

Part #	Hex	L	
		mm	in
A3B1/4-2	1/4"	50	1.97
A3B1/4-2.5	1/4"	63	2.50
A3B5/16-2	5/16"	50	1.97
A3B5/16-2.5	5/16"	63	2.50
A3B3/8-2	3/8"	50	1.97
A3B3/8-2.5	3/8"	63	2.50
A3B05-2.75	5 mm	70	2.76
A3B55-1.2	5.5 mm	30	1.18
A3B55-2.75	5.5 mm	70	2.76
A3B55-4	5.5 mm	100	3.94
A3B06-2.75	6 mm	70	2.76
A3B07-1.2	7 mm	30	1.18
A3B07-2	7 mm	50	1.97
A3B07-2.75	7 mm	70	2.76
A3B07-4	7 mm	100	3.94
A3B08-1.2	8 mm	30	1.18
A3B08-2	8 mm	50	1.97
A3B08-2.75	8 mm	70	2.76
A3B08-4	8 mm	100	3.94
A3B08-6	8 mm	150	5.91
A3B08-8	8 mm	200	7.87
A3B09-2.75	9 mm	70	2.76
A3B09-4	9 mm	100	3.94
A3B10-1.2	10 mm	30	1.18
A3B10-2	10 mm	50	1.97
A3B10-2.75	10 mm	70	2.76
A3B11-2.75	11 mm	70	2.76
A3B12-1.2	12 mm	30	1.18
A3B13-2.75	13 mm	70	2.76
A3B14-2.75	14 mm	70	2.76
A3B16-2.75	16 mm	70	2.76
A3B17-2.75	17 mm	70	2.76

BITS & SOCKETS

Quick Change Chucks

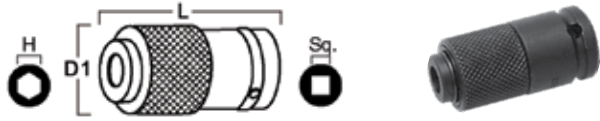


Part #	Sq. Drive	Hex	D1		L	
			mm	in	mm	in
ADC-2S	1/4"	1/4"	19	0.75	38	1.50
ADC-3S	3/8"	1/4"	20	0.79	42	1.65
ADC-4S	1/2"	1/4"	19	0.75	46	1.81
ADC-3SH7/16Z	3/8"	7/16"	25	0.98	46	1.81
ADC-4SH7/16Z	1/2"	7/16"	33	1.30	55	2.17

Phillips Insert Bits




Part No	Point Size	L	
		mm	in
A38S2-1	2	25	0.98
A38S3-1	3	25	0.98

Square Recess Bits




Part No	Point Size	Nominal Square Size	L	
			mm	in
A3R1/8-2.75	2	1/8"	70	2.76
A3R9/64-2.75	3	9/64"	70	2.76

Square Recess Insert Bits




Part No	Point Size	Nominal Square Size	L	
			mm	in
A3R1/8-1	2	1/8"	25	0.98
A3R9/64-1	3	9/64"	25	0.98

Slotted Insert Bits




Part No	Screw Size	L		Blade Thickness	Blade Width
		mm	in		
A38M8-1	8	25	0.98	0.04	0.25
A38M10-1	10	25	0.98	0.05	0.28

Phillips Single-Ended Power Bits



Part #	Point Size	L	
		mm	in
A3S0-2	0	50	1.97
A3S1-2	1	50	1.97
A3S1-2.75	1	70	2.76
A3S1-3	1	75	2.95
A3S1-3.5	1	90	3.54
A3S1-4	1	100	3.94
A3S1-6	1	150	5.91
A3S2-1.2	2	30	1.18
A3S2-1.6	2	40	1.57
A3S3-2	3	50	1.97
A3S3-2.75	3	70	2.76


Phillips Double-Ended Power Bits



Part #	Size	L	
		mm	in
A3W1-3	1	75	2.94
A3W2-2	2	50	1.97
A3W2-3	2	75	2.94
A3W2-4	2	100	3.94
A3W2-6	2	150	5.91
A3W2-8	2	200	7.87
A3W2-10	2	250	9.84
A3W2-12	2	300	11.81
A3W3-2	3	50	1.97
A3W3-3	3	75	2.94
A3W3-4	3	100	3.94
A3W3-6	3	150	5.91
A3W3-8	3	200	7.87


BITS & SOCKETS

Slotted Power Bits



Part #	Screw Size	mm	L in	Blade Thickness	Blade Width
A3M8-3	8	75	2.95	0.04	0.28
A3M10-3	10	75	2.95	0.05	0.31

Torx Power Bits



Part #	Torx Size	mm	L in
A3T6-2	T6	50	1.97
A3T7-2	T7	50	1.97
A3T7-2.75	T7	70	2.76
A3T7-3.5	T7	90	3.54
A3T7-6	T7	150	5.91
A3T8-2	T8	50	1.97
A3T9-2.75	T9	70	2.76

Bit Holders



Part #	MM	L IN
1/4" Hex, Magnetic		
A3BHM-3	75	2.94
A3BHM-4	100	3.94
A3BHM-6	150	5.91
A3BHM-8	200	7.87
A3BHM-10	250	9.84

Bit and Nutsetter Part Number Nomenclature

Precedes Part Number

BITS		A7	7/16 Power Drive
A3S	Phillips® Power Drive	AS	Electric Type Phillips®
A3W	Double Ended Phillips®	AM	Electric Type Slotted
A38S	Phillips® Insert	ATW	Electric Type Tri-Wing®
A39S	Phillips® Insert Reduced Nose	AT	Electric Hios Type Torx®
A3M	Slotted Power Drive	A26S	Electric Driver Phillips®
A38M	Slotted Insert	A26M	Electric Driver Slotted
A3MT	Slotted Power Drive Reduced Nose	A26C	Electric Driver Allen Socket Head
A3C	Allen Socket Head Power Drive	A3BHM	Insert Bit Holder (Magnetic Type)
A38C	Allen Socket Head Insert	A3BHD	Insert Bit Holder (Non Magnetic)
A3R	Square Recess Power Drive	NUTSETTERS	
A3RT	Square Recess Turned Down (Power)	A3B	Nutsetter
A38R	Square Recess Insert	A3BMP	Magnetic (MP) Pressed Type
A3T	Torx® Power Drive	A3BMS	Magnetic (MS) Spring Loaded
A38T	Torx® Insert	A3BMT	Magnetic (MT) Tube Type
A3TS	Torq-Set® Power Drive	A3BU	Universal Nutsetter
A38TS	Torq-Set® Insert	MAG-O-NETS	
A3TA	Triangle Power Drive	AM	AIMCO Mag-O-Net®
A3TW	Tri-Wing® Power Drive		
A38TW	Tri-Wing® Insert		

Contained within Part Number

Bits		ACRB	ACR® 4x4 Both Install and Remove
PZ	Pozidriv®	E4	Electric 4mm diameter
PZACR	Pozidriv® ACR®	E5	Electric 5mm diameter
SDV	Supadriv®	RS	Reduced Shank
TR	Torx® Tamper Resistant		
ACRI	ACR® Installation		
ACR	ACR® Remove		

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an Eagle Group Customer Service Associate at (503) 254-6600, or toll free (800) 852-1368.

RESOURCES

RESOURCES

Eagle Group: Power Tool Solutions











For more information on tools, accessories, service, and training, contact your Eagle Group Customer Service Associate at (503) 254-6600 or (800) 852-1368.

CONVERSION TABLES

Fraction • Decimal • Metric Conversions (to .32)

Fraction	Decimal	mm	Fraction	Decimal	mm	Fraction	Decimal	mm	Fraction	Decimal	mm
1/32	.03125	.7938	9/32	.28125	7.1438	17/32	.53125	13.4938	25/32	.78125	19.8438
1/16	.0625	1.5875	5/16	.3125	7.9375	9/16	.5625	14.2875	13/16	.8125	20.6375
3/32	.09375	2.3812	11/32	.34375	8.7312	19/32	.59375	15.0812	27/32	.84375	21.4312
1/8	.125	3.175	3/8	.375	9.525	5/8	.625	15.875	7/8	.875	22.225
5/32	.15625	3.9688	13/32	.40625	10.3188	21/32	.65625	16.6688	29/32	.90625	23.0188
3/16	.1875	4.7625	7/16	.4375	11.1125	11/16	.6875	17.4625	15/16	.9375	23.8125
7/32	.21875	5.5562	15/32	.46875	11.9062	23/32	.71875	18.2562	31/32	.96875	24.6062
1/4	.25	6.35	1/2	.5	12.7	3/4	.75	19.05	1	1.0	25.4

Thread Size to Hex Size

 Metric Bolt Size	 Socket Hex Size (mm)	 Metric Bolt Size	 Socket Hex Size (mm)	 Metric Bolt Size	 Socket Hex Size (mm)	 SAE Bolt Size	 Socket Hex Size (in)	 UNC Bolt Size	 Socket Hex Size (in)
M 2	4	M 14	21	M 52	80	1/4	7/16	1/4	7/16
M 2.3	4.5	(M 14)	22	M 56	85	5/16	1/2	5/16	1/2
M 2.6	5	M 16	24	M 60	90	3/8	9/16	3/8	9/16
M 3	5.5	M 18	27	M 64	95	7/16	5/8	7/16	11/16
M 3.5	6	M 20	30	M 68	100	1/2	3/4	1/2	3/4
M 4	7	(M 22)	32	M 72	105	9/16	7/8	9/16	7/8
M 5	8	M 22	34	M 76	110	5/8	15/16	5/8	15/16
(M 5-6)	9	M 24	36	M 80	115	3/4	1-1/16	3/4	1-1/8
M 6	10	M 27	41	M 85	120	7/8	1-1/4	7/8	1-5/16
M 7	11	M 30	46	M 90	130	1-1/8	1-7/16	1	1-1/2
M 8	13	M 33	50	M 95	135	1-1/4	1-13/16	1-1/8	1-11/16
(M 8)	14	M 36	55	M 100	145	1-3/8	2	1-1/4	1-7/8
M 10	16	M 39	60	M 105	150	1-1/2	2-3/16	1-3/8	2-1/16
(M 10)	17	M 42	65	M 110	155			1-1/2	2-1/4
M 12	18	M 45	70	M 115	165			1-3/4	2-5/8
(M 12)	19	M 48	75	M 120	170			2	3
								2-1/4	3-3/8
								2-1/2	3-3/4

Torque Conversion Factors

Units to be Converted	SAE			METRIC			INTERNATIONAL SYSTEM - S.I.		
	ozf-in	lbf-in	lbf-ft	gf-cm	kgf-cm	kgf-m	mNm	cNm	Nm
1 ozf-in	1	0.0625	0.005	72	0.072	0.0007	7.062	0.706	0.007
1 lbf-in	16	1	0.083	1152.1	1.152	0.0115	113	11.3	0.113
1 lbf-ft	192	12	1	13826	13.83	0.138	1356	135.6	1.356
1 gf-cm	0.014	0.0009	0.00007	1	0.001	0.00001	0.098	0.01	0.0001
1 kgf-cm	13.89	0.868	0.072	1000	1	0.01	98.07	9.807	0.098
1 kgf-m	1389	86.8	7.233	100000	100	1	9807	980.7	9.807
1 mN-m	0.142	0.009	0.0007	10.2	0.01	0.0001	1	0.1	0.001
1 cN-m	1.42	0.088	0.007	102	0.102	0.001	10	1	0.01
1 N-m	141.6	8.851	0.738	10197	10.20	0.102	1000	100	1

WARRANTY INFORMATION

NEW TOOL AND ACCESSORY WARRANTY

Any new tool or accessory branded with the Eagle name, and purchased from EAGLE GROUP (EAGLE), or through one of its authorized distributors or agents, is warranted to the original buyer against defects in materials and workmanship for a period of one (1) year* from date of delivery. Under the terms of this warranty, EAGLE GROUP will repair or replace any product or accessory warranted hereunder and returned freight prepaid proving to EAGLE GROUP's satisfaction to be defective as a result of workmanship or materials. In order to qualify for this warranty, written notice to EAGLE GROUP must be given immediately upon discovery of such defect, at which time EAGLE GROUP will issue an authorization to return the tool. The defective item must be promptly returned to an authorized EAGLE GROUP service center with all freight charges prepaid.

REPAIRED TOOL WARRANTY

Once a tool is beyond the new product warranty period, as detailed above, EAGLE GROUP will provide repair warranty on pneumatic tools for a period of 90 days* beyond the warranted repair date.

EXCLUSION FROM WARRANTY

This warranty is valid only on products purchased from EAGLE GROUP, or thru its authorized distributors or agents. EAGLE GROUP shall have no obligation pursuant to the EAGLE GROUP Warranty with respect to any tools or accessories which in EAGLE GROUP's sole judgment have been altered, damaged, misused, abused, badly worn, lost or improperly maintained. This Warranty is null and void if the customer, or any other person other than an authorized representative of EAGLE GROUP, has made any attempt to service or modify the tool or accessory prior to its return to EAGLE GROUP under this Warranty.

The warranty provision with respect to each such product may be amended by EAGLE GROUP from time to time in its sole discretion. The liability of EAGLE GROUP hereunder shall be limited to replacing or repairing, at its option, any products which are returned freight prepaid to EAGLE GROUP and which EAGLE GROUP determines to be defective as described above or, at EAGLE GROUP's option, refunding the purchase price of such products.

EAGLE GROUP reserves the right to make periodic changes in construction or tool design at any time. EAGLE GROUP specifically reserves the right to make these changes without incurring any obligation or incorporating such changes or updates in tools or parts previously distributed.

THE EAGLE GROUP WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND EAGLE GROUP EXPRESSLY DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SETS FORTH THE SOLE AND EXCLUSIVE REMEDY IN CONTRACT, TORT, STRICT LIABILITY, OR OTHERWISE.

THIS WARRANTY IS THE ONLY WARRANTY MADE BY EAGLE GROUP WITH RESPECT TO THE GOODS DELIVERED HEREUNDER, AND MAY BE MODIFIED OR AMENDED ONLY BY A WRITTEN INSTRUMENT SIGNED BY A DULY AUTHORIZED OFFICER OF EAGLE GROUP.

LIMITATION OF LIABILITY

EAGLE GROUP'S LIABILITY PURSUANT TO WARRANTY OF THE PRODUCTS COVERED HEREUNDER IS LIMITED TO REFUND OF THE PURCHASE PRICE. IN NO EVENT SHALL EAGLE GROUP BE LIABLE FOR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS BY THE BUYER. IN NO EVENT SHALL EAGLE GROUP BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL OR OTHER DAMAGES (INCLUDING WITHOUT LIMITATION, LOSS OF PROFIT) WHETHER OR NOT EAGLE GROUP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSS, HOWEVER CAUSED, WHETHER FOR BREACH OR REPUDIATION OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE OR OTHERWISE. THIS EXCLUSION ALSO INCLUDES ANY LIABILITY WHICH MAY ARISE OUT OF THIRD PARTY CLAIMS AGAINST BUYER. THE ESSENTIAL PURPOSE OF THIS PROVISION IS TO LIMIT THE POTENTIAL LIABILITY OF EAGLE GROUP ARISING OUT OF THIS AGREEMENT AND/OR SALE.

Note: The EAGLE GROUP Warranty confers specific legal rights, however some states or jurisdictions may not allow certain exclusions or limitations within this warranty.

* All warranty periods addressed herein are determined using a standard shift, eight-hour work day.

EAGLE GROUP

Attn: Service Department
10000 SE Pine Street
Portland, OR 97216
800.852.1368

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
A									
AB-3	54	APTH-14OE1	48	AT5-12	54	J		TW-5	56
AB-3/5	54	APTH-14OE13	48	ATC-10	49	JJ30	55	TW-9	56
AB-5	54	APTH-14OE14	48	ATC-25	49	JJ30-S	55	TW-15	56
ABT-3	54	APTH-14OE15	48	ATC-100	49	JJ30-TA	55	TW-22	56
ABT-5	54	APTH-14OE16	48	ATC-150F	49			TW-30	56
AD-D1098-P	52	APTH-14OE17	48	ATC-250	49			TW-40	56
AD-D1098-PAC	52	APTH-14OE18	48	ATN-3	54	M		TW-50	56
AD-D1098-PACE	52	APTH-14OE19	48	ATN-5	54	MAG-O-NETS	.61	TW-60	56
AD-D1098-S	52	APTH-14OE21	48	ATW-50	55			TW-70	56
AD-D1098-SAC	52	APTH-14OE22	48	AUB-5	54				
AEP-3	54	APTH-14OE24	48	AUET-10(-DC)	50	R		U	
AEP-5	54	APTH-14OE25	48	AUET-50(-DC)	50	RMA-7L	56	UG-60S-29	46
AES-3	54	APTH-14OE27	48	AUET-0100(-DC)	50	RMA-15L	56	UG-65-EBL-ASSY	46
AES-5	54	APTH-14OE30	48	AUET-250(-DC)	50	RMA-20L	56	UG-1250LM	46
AFRL-4	58	APTH-14OE32	48	AUET-500(-DC)	50	RPA-1	56	USG-4VL	46
AFA5-400	53	APTH-14OE34	48	AUET/MTM-10-100(-DC)	50	RPA-2	56	UT-60-07	36
AFA10-550	53	APTH-14OE36	48	AUET/MTM-050-25	50	RPA-3	56	UT-60-07-ASSY	36
AFA15-400	53	APTH-14OE38	48	AUET/MTM-50-250(-DC)	50				
AFRL-2	58	APTH-14OE41	48	AUET/MTM-50-500(-DC)	50	S		W	
AFRL-2-C	58	APTH-14OE118	48	AUET/MTM-050-600(-DC)	50	SH-5	54	WSCH	54
AFRL-3	58	APTH-14OE138	48	AUET/MTM-0100-050(-DC)	50	SIW-38PR	32		
AFRL-3-C	58	APTH-14RE32	48	AWC-5	54	SIW-50PR	32	Numbers	
AFRL-8	58	APTH-14RT34	48	AW3F	54	SIW-B20LI	32	1101	29
AHB-3	54	APTH-14RT50	48	AW3FMF	55	SIW-B20LI-HC	32	1102	29
AHB-5	54	APTH-14SD50	48	AW3S	54	SIW-C18-20	32	1105	29
AIC5-2	54	APTW-25	48	AW6F	54	SIW-P2525Q	32	1115	30
AJH-3	54	APTW-50	48	AW6FMF	55	SIW-P3225Q	32	1121	30
AJH-5	54	APTW-100	48	AW6FMS	55	SIW-P3238	32	1150	30
AJS3	54	APTW-150	48	AW6S	54	SIW-P5538	32	1577	30
ALA5-200	53	APTW-200	48			SIW-P5550	32	250-RZ	60
ALA10-400	53	APTW-340	48	B		SIW-P10050	32	250-SZ	60
ALA15-200	53	ARDIA-10	51	B23	60	SIW-P12050	32	2004	20
ALA40-300	53	ARDIA-25	51	B23E	60	SIW-PBL	32	2010	19
ALA200-400	53	ARDIA-50	51	B25	60	SPC-2PGM	34	2225	20
ALA400-400	53	ARDIA-100	51	BJ10082	34	SPC-A21025	33	2263EC	19
AMP-5	54	ARDIA-150	51	BJ10083	34	SPC-A21025Q	33	2403L	22
APTH-12ADP	48	ARDIA-250	51			SPC-A21038	33	2450	21
APTH-12BLANK	48	ARDIA-350	51	E		SPC-A21625	33	2453	21
APTH-12OE7	48	ARDIA-500	51	EAA-04	53	SPC-A21625Q	33	2463	21
APTH-12OE8	48	ARDIA-750	51	EAP-202ASSY	53	SPC-A21638	33	21226	34, 55
APTH-12OE9	48	ARDIA-1000	51	EAP-202ED-KIT	53	SPC-A23038	33	28796	59
APTH-12OE10	48	ASB-OC	57	EAP-203-ASSY	53	SPC-A23538	33	2P-15501	21
APTH-12OE11	48	ASB-3C	57	EPTS-3301I-25Q	31	SPC-A25038	33	2P-155034	21
APTH-12OE12	48	ASB-5C	57	EPTS-3301IP-25Q	31	SPC-A27038	33	2S-290015	22
APTH-12OE13	48	ASC-3	54	EPTS-33017-25Q	31	SPC-A210050	33	375-RZ	60
APTH-12OE14	48	ASC-5	54	EPTS-33017P-25Q	31	SPC-B218LI	34	375-SZ	60
APTH-12OE15	48	ASH-250C-10MSZ	59	EPTS-33023-25Q	31	SPC-B218LI-HC	34	3100	24
APTH-12OE16	48	ASH-250C-15MSZ	59	EPTS-33023P-25Q	31	SPC-C218-20	34	3105	24
APTH-12OE17	48	ASH-250C-25MSZ	59	EPTS-34008-25Q	31	SPC-P2325Q	33	3115	24
APTH-12OE18	48	ASH-375C-15MSZ	59	EPTS-34008P-25Q	31	SPC-P2625Q	33	3205	24
APTH-12OE19	48	ASH-375C-25MSZ	59	EPTS-34015-25Q	31	SPC-P2925Q	33	3220	24
APTH-12OE20	48	ASH-375Z	59	EPTS-34015P-25Q	31	SPC-P21225Q	33	3320	24
APTH-12OE50	48	ASH-500C-15MSZ	59	EPTS-34021-25Q	31	SPC-QC	34	32046-31-02	6
APTH-12RE50	48	ASH-500C-25MSZ	59	EPTS-34021P-25Q	31			4001	40
APTH-12RT25	48	ASH-500Z	59	EPTS-35005P-25Q	31	T		4004	41
APTH-12RT38	48	AT3-3	54	EPTS-35008P-25Q	31	TA-50-2	55	4005	41
APTH-12RT50	48	AT3-4	54	EPTS-35017P-25Q	31	TS-20NP-2NPT	60	4005SC	41
APTH-12SD25	48	AT3-6	54	EPTS-N34003-25	31	TS-20US-2NPT	60	4009	40
APTH-12SD38	48	AT3-9	54	EPTS-N34003-38	31	TS-30NP-2NPT	60	4010	40
APTH-12SD50	48	AT5-3	54			TS-30US-3NPT	60	4100	40
APTH-14ADP	48	AT5-4	54	F		TW-00	56	4178	40
APTH-14BLANK	48	AT5-6	54	FA-50-2	55	TW-0	56	4260	40
		AT5-9	54			TW-3	56		

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
4615	.41	6191	.45	A3B07-1.2	.63	A31/4MP	.62	A819	.62
4620	.41	6507	.14	A3B07-2	.63	A33/8	.62	A821	.62
5A-0514-2	10, 44	6812EC	.45	A3B07-2.75	.63	A33/8MP	.62	ADC-2S	.64
5A-0514-2CB	.44	6905EC	.15	A3B07-4	.63	A35/16	.62	ADC-3S	.64
5A-1012-5	.11	6906EC	.15	A3B08-1.2	.63	A35/16MP	.62	ADC-3SH7/16Z	.64
5A-1676-7	.11	7P-0620-1	.29	A3B08-2	.63	A302A	.63	ADC-4S	.64
5A-04122	.9	7P-0620-2	.38	A3B08-2.75	.63	A304C	.63	ADC-4SH7/16Z	.64
5A-04202	.9	7P-0620-4	.38	A3B08-4	.63	A306	.62	AM1/4Z	.61
5G-10125	.44	7P-0620-5	.38	A3B08-6	.63	A307	.62	AM3/16Z	.61
5I-03302	.6	7P-0620-7	.38	A3B08-8	.63	A307-2	.62	AM5/16Z	.61
5I-03302F	.6	7P-1028-1	.29	A3B09-2.75	.63	A307-2.75	.62	AM5Z	.61
5I-04252	.7	7P-1028-4	.38	A3B09-4	.63	A308	.62	CVF Series Anti-Marring Sockets	
5I-04252X	.8	7P-1028-5	.38	A3B10-1.2	.63	A308-2	.62	62	
5I-06202X	.8	7P-1028-7	.38	A3B10-2	.63	A308MP	.62	CV Series Anti-Marring Sockets62	
5I-06222	.7	712P-420	.37	A3B10-2.75	.63	A310MP	.62	MARK-XXXX Marker Sockets .	.61
5I-06251	.7	714P-2100R	.37	A3B11-2.75	.63	A310U	.63		
5I-10202	.7	738P-3200	.37	A3B12-1.2	.63	A311MP	.62		
5I-10202X	.8	7005	.36	A3B13-2.75	.63	A311U	.63		
500-SZ	.60	7021	.60	A3B14-2.75	.63	A375E	.63		
5000	.6	7021AG	.60	A3B16-2.75	.63	A41/2	.62		
5001	.6	7041A	.60	A3B17-2.75	.63	A41/2-3.25	.62		
5002C	.6	7041AG	.60	A3B55-1.2	.63	A41/4C	.63		
5003C	.9	7051	.60	A3B55-2.75	.63	A43/8	.62		
5004C	.9	7100	.36	A3B55-4	.63	A43/8-3.25	.62		
5006	.10	7102	.37	A3BHM-3	.65	A47/16	.62		
5007	.10	7106	.38	A3BHM-4	.65	A47/16-3.25	.62		
5008H	.11	7107	.37	A3BHM-6	.65	A403A	.63		
5040	.12	7110	.36	A3BHM-8	.65	A405C	.63		
5040-6	.12	7650	.36	A3BHM-10	.65	A405E	.63		
5040-6CG	.12	730224C	.41	A3S0-2	.64	A408	.62		
5040-7G	.12	8101	.10	A3S1-2	.64	A408MP	.62		
5040-9	.12	8102	.10	A3S1-2.75	.64	A409	.62		
5040-9G	.12	8103	.10	A3S1-3	.64	A410	.62		
5104	.11	8116	.45	A3S1-3.5	.64	A410-2	.62		
5105	.11	9020D	.26	A3S1-4	.64	A410-3	.62		
5110	.6	9024	.41	A3S1-6	.64	A410-3.25	.62		
5116	.8	9025	.26	A3S2-1.2	.64	A410MP	.62		
5194EC	.10	9025D	.26	A3S2-1.6	.64	A411-3.25	.62		
5194EC-KIT	.10	9043	.41	A3S3-2	.64	A412MP	.62		
5195EC	.10			A3S3-2.75	.64	A412U	.63		
5195EC-KIT	.10			A3T6-2	.65	A413U	.63		
5196EC	.10	Bits and Sockets		A3T7-2	.65	A504A	.63		
5196EC-KIT	.10	A128A	.63	A3T7-2.75	.65	A#508A	.63		
5200EC	.7	A1220E	.63	A3T7-3.5	.65	A63/4	.62		
5201EC	.7	A148E	.63	A3T7-6	.65	A63/4-4	.62		
5202EC	.9	A2426E	.63	A3T8-2	.65	A604A	.63		
5203EC	.9	A3M8-3	.65	A3T9-2.75	.65	A610E	.63		
5205-2EC	10, 45	A3M10-3	.65	A3W1-3	.64	A611/16	.62		
5206EC	.8	A3R1/8-2.75	.64			A611/16-4	.62		
5207EC	.8	A3R9/64-2.75	.64	A3W2-2	.64	A613/16	.62		
6005	.15	A38M8-1	.64	A3W2-3	.64	A613/16-4	.62		
6009	.15	A38M10-1	.64	A3W2-4	.64	A614	.62		
6012	.14	A38R1/8-1	.64	A3W2-6	.64	A616	.62		
6017	.16	A38R9/64-1	.64	A3W2-8	.64	A617	.62		
6050	.44	A38S2-1	.64	A3W2-10	.64	A617-4	.62		
6080	.44	A38S3-1	.64	A3W2-12	.64	A618-4	.62		
6113	.16	A3B1/4-2	.63	A3W3-2	.64	A619-4	.62		
6114	.16	A3B1/4-2.5	.63	A3W3-3	.64	A81	.62		
6115	.16	A3B3/8-2	.63	A3W3-4	.64	A87/8	.62		
6115EC	.14	A3B3/8-2.5	.63	A3W3-6	.64	A806A	.63		
6116	.16	A3B05-2.75	.63	A3W3-8	.64	A810E	.63		
6133EC	.14	A3B5/16-2	.63	A31/4	.62	A815/16	.62		
6134EC	.14	A3B5/16-2.5	.63	A31/4C	.63	A817	.62		
		A3B06-2.75	.63						



AIMCO CORPORATE HEADQUARTERS

10000 SE Pine Street
Portland, Oregon 97216
Phone: (503) 254-6600
Toll Free: (800) 852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529
Chihuahua, Chihuahua. 31125
Mexico
Phone: (01-614) 380-1010
Fax: (01-614) 380-1019