


# EAGLE GROUP

A Division of AIMCO



## POWER TOOL SOLUTIONS

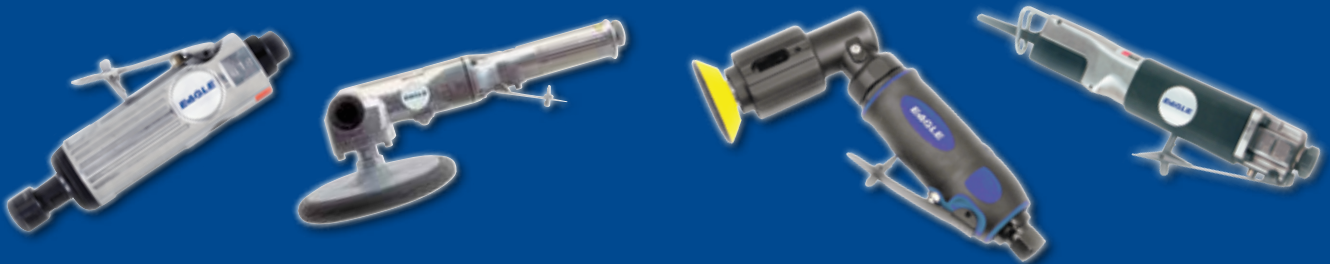

FOR RECREATIONAL MARINE APPLICATIONS



GENERAL DUTY

## 5002C 1/4" Die Grinder

- All steel housing
- Built-in regulator
- 1/8" collet available

### Specifications

Collet Size:	1/4"
RPM (Approx.):	22,000
Throttle Type:	Safety Lever
Exhaust:	Rear
Weight:	1.2 lb / 0.5 kg
Length:	6.9 in / 175 mm
Power (Approx.):	0.33 hp
Air Usage:	14 cfm
Air Inlet:	1/4"



GENERAL DUTY

## 5003C 1/4" Angle Die Grinder

- Compact lightweight design
- Ball-bearing construction
- For sanding, deburring, and polishing
- Right angle provides easy access

### Specifications

Collet Size:	1/4"
RPM (Approx.):	20,000
Throttle Type:	Safety Lever
Exhaust:	Rear
Weight:	1.0 lb / 0.5 kg
Length:	6.3 in / 159 mm
Power (Approx.):	0.33 hp
Air Usage:	14 cfm
Air Inlet:	1/4"





INDUSTRIAL DUTY

## 6133EC 2" Composite Angle Sander, 90°

- Lightweight and durable
- Ergonomic composite housing with a soft comfortable grip
- Less noise, vibration, and thermal transfer than aluminum tools
- Roll lock abrasive holder

### Specifications

Sanding Disc:	2"
Pad Size:	1.75" diameter
RPM (Approx.):	15,000
Spindle:	1/4" - 20
Weight:	1.05 lb / 0.48 kg
Length:	6.75 in / 171 mm
Air Usage:	12 cfm
Air Inlet:	1/4"



INDUSTRIAL DUTY

## 6134EC 2" Composite Angle Sander, 105°

- Lightweight and durable
- Ergonomic composite housing with a soft comfortable grip
- Less noise, vibration, and thermal transfer than aluminum tools
- Roll lock abrasive holder

### Specifications

Sanding Disc:	2"
Pad Size:	1.75" diameter
RPM (Approx.):	15,000
Weight:	1.05 lb / 0.48 kg
Length:	6.75 in / 171 mm
Air Usage:	12 cfm
Air Inlet:	1/4"



INDUSTRIAL DUTY

## 6115EC 2" Angle Orbital Composite Sander, 105°

- Lightweight and durable
- Pad Size: 2" Diameter, M6 x 1.0 thread, yellow polyurethane foam pad, hooked Velcro face
- Orbital Capacity: 0.2" / 3.0 mm

### Specifications

Pad Size:	2" diameter
RPM (Approx.):	15,000
Spindle:	1/4" - 20
Weight:	1.36 lb / 0.62 kg
Length:	6.75 in / 171 mm
Air Usage:	12 cfm
Air Inlet:	1/4"



GENERAL DUTY

## 6012 7" Sander

- Powerful 1 hp motor
- Dead handle mounts either side
- Hardened and ground spiral bevel gears for long life
- For heavy rust removal, sanding and shaping of filler patches

### Specifications

Pad Size:	7"
RPM (Approx.):	4,500
Power (Approx.):	1.00 hp
Weight:	6.0 lb / 2.7 kg
Length:	15 in / 381 mm
Air Usage:	19 cfm
Air Inlet:	1/4"



INDUSTRIAL DUTY

## 6905EC 5" Composite Random Orbital Sander

- Vibration absorbing grip
- High power and lightweight
- PSA pad type
- Orbital action assures swirl-free finish
- For touch-up, feather-edging, sanding, pre-paint preparation

### Specifications

Pad Size:	5"
RPM (Approx.):	12,000
Orbit:	3/16" pattern
Weight:	2.0 lb / 0.9 kg
Length:	6.9 in / 175 mm
Air Usage:	15 cfm
Air Inlet:	1/4"





INDUSTRIAL DUTY

## 6906EC 6" Composite Random Orbital Sander

- Vibration absorbing grip
- High power and lightweight
- PSA pad type
- Orbital action assures swirl-free finish
- For touch-up, feather-edging, sanding, pre-paint preparation

### Specifications

Pad Size:	6"
RPM (Approx.):	12,000
Orbit:	3/16" pattern
Weight:	2.0 lb / 0.9 kg
Length:	6.9 in / 175 mm
Air Usage:	15 cfm
Air Inlet:	1/4"



GENERAL DUTY

## 6009 Jitterbug Sander

- Durable construction
- For wet and dry sanding
- For wood, metal or plastic finishing, and fiberglass

### Specifications

Pad Size:	3.5 x 7.75 in 89 x 197 mm
RPM (Approx.):	8,000
Weight:	4.3 lb / 2.0 kg
Length:	8.0 in / 203 mm
Air Usage:	15 cfm
Air Inlet:	1/4"




GENERAL DUTY

## 6113 3" - 5" High Speed Sander

- Lightweight, compact design
- Includes 3" & 5" backing pads
- Built-in regulator to control speed
- For paint removal, shaping filler patches, weld smoothing, rust removal

### Specifications

Pad Size:	3" & 5"
RPM (Approx.):	18,000
Spindle:	3/8"
Weight:	2.4 lb / 1.1 kg
Length:	4.6 in / 117 mm
Air Usage:	19 cfm
Air Inlet:	1/4"




GENERAL DUTY

## 6507 7" Angle Polisher 105°

- Built-in power regulator
- Dead handle for easy control
- Ideal for buffing and polishing paint and metal to a professional finish

### Specifications

Pad Size:	7"
RPM (Approx.):	2,500
Weight:	6.5 lb / 2.9 kg
Length:	18.0 in / 457 mm
Air Usage:	12 cfm
Air Inlet:	1/4"

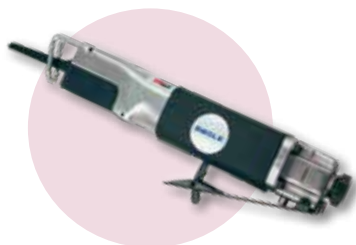

GENERAL DUTY

## 6050 Reciprocating Saw

- High performance motor provides aggressive cutting action
- Insulated handle
- For cutting plastics, fiberglass, sheet metal

### Specifications

SPM (Approx.):	9,500
Teeth:	14 / 24 / 32
Stroke:	10 mm
Weight:	2.2 lb / 1.0 kg
Length:	9.3 in / 236 mm
Air Usage:	7 cfm
Air Inlet:	1/4"



INDUSTRIAL DUTY

## 6080 Low-Vibration Reciprocating Saw

- 35% longer stroke for "quicker and thicker" material cuts
- Patented vibration-damped cylinder design decreases vibration emission by 40%
- Patented blade guard prevents metal filing from entering the inner mechanism

### Specifications

Stroke:	14 mm
SPM (Approx.):	10,000
Length:	8.9 in / 227 mm
Weight:	1.37 lb / 0.62 kg
Air Hose:	3/8"
Air Usage:	2.3 cfm
Air Inlet:	1/4"



INDUSTRIAL DUTY

## 8116 Suction / Blow Gun

- Reversible nozzle ring creates portable vacuum cleaner
- Acts as a blow gun on reverse side
- Includes two nozzles
- Comes with bag

### Specifications

Capacity:	6.3 cfm
Tip Accessories:	4 pieces
Weight:	1.0 lb / 0.4 kg
Length:	5.7 in / 144 mm



INDUSTRIAL DUTY

## 5A-0514-2 Back-Gouging Mini Saw

- Industrial-grade and compliant tool design ensures fast and effective back-gouging
- Angle height: 1.75"
- 2" carbide tooth blade (#5A-0514-2CB) sold separately
- For gouging tight access seams

### Specifications

Max Blade Diameter	2"
Arbor:	3/8"-24
HP (Approx.):	0.5
RPm (Approx.):	14,000
Weight:	3 lb / 1.4 kg
Length:	8.5 in / 216 mm
Air Usage:	15
Air Inlet:	1/4"

# Warranty Information

## NEW TOOL AND ACCESSORY WARRANTY

Any new tool or accessory branded with the Eagle name, and purchased from EAGLE GROUP (EAGLE), or through one of its authorized distributors or agents, is warranted to the original buyer against defects in materials and workmanship for a period of one (1) year\* from date of delivery. Under the terms of this warranty, EAGLE GROUP will repair or replace any product or accessory warranted hereunder and returned freight prepaid proving to EAGLE GROUP's satisfaction to be defective as a result of workmanship or materials. In order to qualify for this warranty, written notice to EAGLE GROUP must be given immediately upon discovery of such defect, at which time EAGLE GROUP will issue an authorization to return the tool. The defective item must be promptly returned to an authorized EAGLE GROUP service center with all freight charges prepaid.

## REPAIRED TOOL WARRANTY

Once a tool is beyond the new product warranty period, as detailed above, EAGLE GROUP will provide repair warranty on pneumatic tools for a period of 90 days\* beyond the warranted repair date.

## EXCLUSION FROM WARRANTY

This warranty is valid only on products purchased from EAGLE GROUP, or thru its authorized distributors or agents. EAGLE GROUP shall have no obligation pursuant to the EAGLE GROUP Warranty with respect to any tools or accessories which in EAGLE GROUP's sole judgment have been altered, damaged, misused, abused, badly worn, lost or improperly maintained. This Warranty is null and void if the customer, or any other person other than an authorized representative of EAGLE GROUP, has made any attempt to service or modify the tool or accessory prior to its return to EAGLE GROUP under this Warranty.

The warranty provision with respect to each such product may be amended by EAGLE GROUP from time to time in its sole discretion. The liability of EAGLE GROUP hereunder shall be limited to replacing or repairing, at its option, any products which are returned freight prepaid to EAGLE GROUP and which EAGLE GROUP determines to be defective as described above or, at EAGLE GROUP's option, refunding the purchase price of such products.

EAGLE GROUP reserves the right to make periodic changes in construction or tool design at any time. EAGLE GROUP specifically reserves the right to make these changes without incurring any obligation or incorporating such changes or updates in tools or parts previously distributed.

THE EAGLE GROUP WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND EAGLE GROUP EXPRESSLY DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SETS FORTH THE SOLE AND EXCLUSIVE REMEDY IN CONTRACT, TORT, STRICT LIABILITY, OR OTHERWISE.

THIS WARRANTY IS THE ONLY WARRANTY MADE BY EAGLE GROUP WITH RESPECT TO THE GOODS DELIVERED HEREUNDER, AND MAY BE MODIFIED OR AMENDED ONLY BY A WRITTEN INSTRUMENT SIGNED BY A DULY AUTHORIZED OFFICER OF EAGLE GROUP.

## LIMITATION OF LIABILITY

EAGLE GROUP'S LIABILITY PURSUANT TO WARRANTY OF THE PRODUCTS COVERED HEREUNDER IS LIMITED TO REFUND OF THE PURCHASE PRICE. IN NO EVENT SHALL EAGLE GROUP BE LIABLE FOR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS BY THE BUYER. IN NO EVENT SHALL EAGLE GROUP BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL OR OTHER DAMAGES (INCLUDING WITHOUT LIMITATION, LOSS OF PROFIT) WHETHER OR NOT EAGLE GROUP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSS, HOWEVER CAUSED, WHETHER FOR BREACH OR REPUDIATION OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE OR OTHERWISE. THIS EXCLUSION ALSO INCLUDES ANY LIABILITY WHICH MAY ARISE OUT OF THIRD PARTY CLAIMS AGAINST BUYER. THE ESSENTIAL PURPOSE OF THIS PROVISION IS TO LIMIT THE POTENTIAL LIABILITY OF EAGLE GROUP ARISING OUT OF THIS AGREEMENT AND/OR SALE.

**Note:** The EAGLE GROUP Warranty confers specific legal rights, however some states or jurisdictions may not allow certain exclusions or limitations within this warranty.

\* All warranty periods addressed herein are determined using a standard shift, eight-hour work day.

### EAGLE GROUP

Attn: Service Department  
10000 SE Pine Street  
Portland, OR 97216  
800.852.1368





AIMCO CORPORATE HEADQUARTERS  
10000 SE Pine Street  
Portland, Oregon 97216  
Phone: (503) 254-6600  
Toll Free: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV  
Ave. Cristobal Colon 14529  
Chihuahua, Chihuahua. 31125  
Mexico  
Phone: (01-614) 380-1010  
Fax: (01-614) 380-1019