

## NOTES:

- 1 FREE SPEED 1500 RPM
- 2 MAX TORQUE 20 NM
- 3 WEIGHT 1.88 LBS / .85 KG
- 4 OUTPUT 3/8" SQ. DRIVE

REVISIONS										
REV.	DESCRIPTION	ECN	DATE	BY	APPRVD					
А	PRODUCTION RELEASE		5-23-01	JFB	PP					





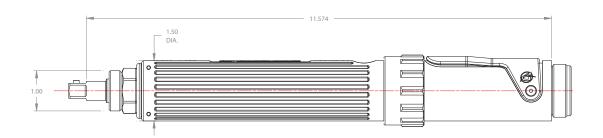



OF ACRADYNE INCORPORATED. IN THE ABSENCE OF EXPRESSED WRITTEN PERMISSION, ACRADYNE HAS LOANED THIS COPY WITH THE UNDERSTADING THAT. A) IT WOULD BE USED FOR ANY PURPOSE EXCEPT THAT FOR WHICH IT WAS I GOALED.	DRAWN	JFB 5-23-01		) <u>Acra</u>	ACRADYNE INC. 1204 E. MAPLE TROY, MI. 48083 U.S.A.			
XCEPT THAT FOR WHICHTI WAS LUMRELS BY DATA ONTAINED THEREIN SHALL NOT BE DISCLOSED TO OTHERS, CIT WILL NOT BE REPRODUCED. DJ IT WILL BE RETURNED ON DEMAND TO ACRADYNE INC.	CHECKED	KJD	AEN	Л 2020 - C	UTLINE			
JNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES IMENSIONS AND TOLERANCES PER ANSI Y14.5	APPROVED	PP	_ 2000	2000 SERIES 3/8 DR. INLINE NUTRUNNER				
SURFACE ROUGHNESS PER ANSI Y14.36  TOLERANCES ON DECIMALS:  X = ±.030	PROJECT NO.	2000	SIZE	PART NO. 215	DRAWING NO. 215		21503	
ANGLE = ±0° 30′ REMOVE BURRS AND SHARP EDGES .01 SR. MAX.	DO NOT SO	ALF DRAWING	SCALE	1:1	SHEET OF 1	1	REVISION	Α