
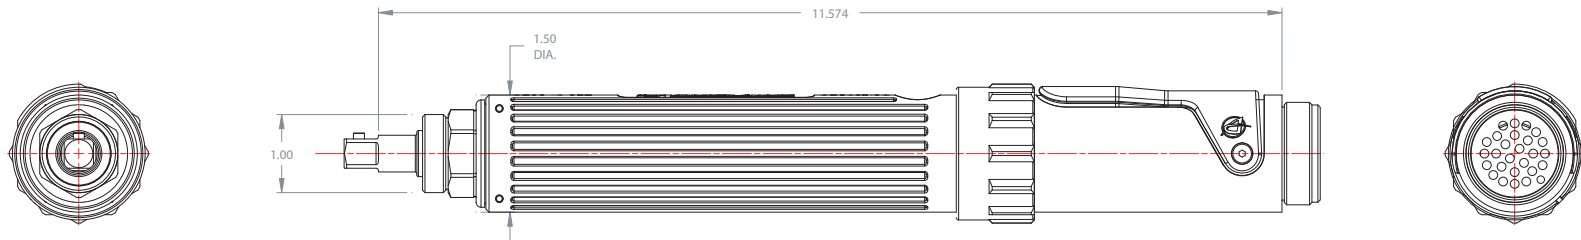


NOTES :

- 1 FREE SPEED - 1025 RPM
- 2 MAX TORQUE - 25 NM
- 3 WEIGHT - 2.16 LBS / 1 KG
- 4 OUTPUT - 3/8" SQ. DRIVE

REVISIONS

| REV. | DESCRIPTION | ECN | DATE | BY | APPRVD |
|------|--------------------|-----|---------|-----|--------|
| A | PRODUCTION RELEASE | --- | 5-23-01 | JFB | PP |

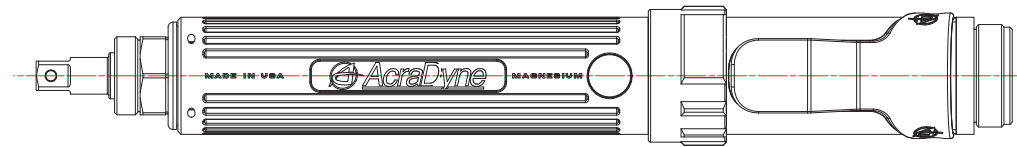

PRINTED COPIES OF THIS DOCUMENT ARE CONSIDERED TO BE UNCONTROLLED. HOLDERS ARE RESPONSIBLE FOR VERIFYING THE CURRENT REVISION LEVEL WITH PURCHASING OR THE DOCUMENT COORDINATOR PRIOR TO USE. THE CONTROLLED VERSION OF THIS DOCUMENT IS ELECTRONICALLY MAINTAINED.

THIS DRAWING EMBODIES CONFIDENTIAL INFORMATION OF ACRADYNE INCORPORATED. IN THE ABSENCE OF EXPRESSED WRITTEN PERMISSION, ACRADYNE HAS LOANED THIS COPY WITH THE UNDERSTANDING THAT, AS IT WOULD BE USED FOR ANY PURPOSE EXCEPT THAT FOR WHICH IT WAS LOANED, BY DATA CONTAINED THEREIN SHALL NOT BE DISCLOSED TO OTHERS. (I) IT WILL NOT BE REPRODUCED, (II) IT WILL BE RETURNED ON DEMAND TO ACRADYNE INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y14.5 SURFACE ROUGHNESS PER ANSI Y14.36

TOLERANCES ON DECIMALS:
 .X = ±.030 .XXX = ±.005
 .XX = ±.010 .XXXX = ±.0005
 ANGLE = ±0° 30'
 REMOVE BURRS AND SHARP EDGES .01 SR. MAX. MACHINE SURFACE FINISH: 125 RMS OR BETTER

| | |
|-----------------------------|-------------|
| DRAWN | JFB 5-23-01 |
| CHECKED | KJD |
| APPROVED | PP |
| PROJECT NO. | 2000 |
| DO NOT SCALE DRAWING | |



ACRADYNE INC.
 1204 E. MAPLE
 TROY, MI. 48083 U.S.A.

AEM 2025 - OUTLINE
 2000 SERIES 3/8 DR. INLINE NUTRUNNER

| | | |
|----------|--------------|--------------|
| SIZE | PART NO. | DRAWING NO. |
| D | 21504 | 21504 |
| SCALE | SHEET OF 1 | REVISION |
| 1:1 | 1 | A |