

NOTES:

- 1 FREE SPEED 2500 RPM
- 2 MAX TORQUE 25 NM
- 3 WEIGHT 4.7 LBS / 2.1 KG
- 4 OUTPUT 1/2" SQ. DRIVE

	REVISIONS										
REV.	DESCRIPTION	ECN	DATE	BY	APPRVD						
Α	PRODUCTION RELEASE		5-21-01	JFB	PP						



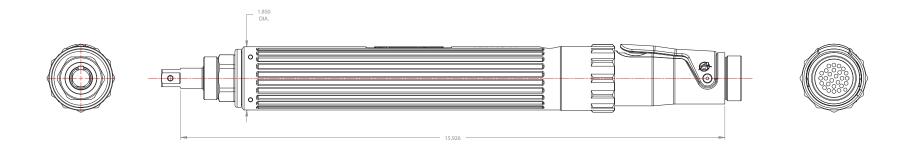

PRINTED COPIES OF THIS DOCUMENT ARE CO WITH PURCHASING OR THE DOCUMENT CO								
THIS GRAWING EMBODIES CONFIDENTIAL INFORMATION OF A CARCIVINE INCORPORATED. IN THE ASSENCE OF EXPRESSE WINTERLY PROMISSION, ACADIVINE HAS LOAMED THIS COPY WITH THE UNDERSTANDING THAIR. A IT WOULD BE USED FOR ANY PURPOSE EXCEPT THAT FOR WHICH IT WAS LOAMED, BID ATA	DRAWN	JFB 5-21-01	6	Acra	<u>Dyne</u>		CRADYNE INC. 1204 E. MAPLE MI. 48083 U.S.A.	
CONTAINED THEREIN SHALL NOT BE DISCLOSED TO OTHERS. C) IT WILL NOT BE REPRODUCED. D) IT WILL BE RETURNED ON DEMAND TO ACRADYINE INC.	CHECKED	KJD	OU ⁻	TLINE - AE	M 3025			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y14.5	APPROVED	PP	3000 SERIES 1/2 DR. INLINE					
SURFACE ROUGHNESS PER ANSI 1714.36 TOLERANCES ON DECIMALS: X = ±.030	PROJECT NO.	3000	SIZE	PART NO. 21490		DRAWING NO. 21490		
ANGLE = ±0° 30′ REMOVE BURRS AND SHARP EDGES .015R. MAX. MACHINE SURFACE FINISH: 125 RMS OR BETTER	DO NOT S	CALE DRAWING	SCALE	1:1	SHEET OF 1	1	REVISION	Α