
NOTES:

- 1 FREE SPEED 1650 RPM
- 2 MAX TORQUE 40 NM
- 3 WEIGHT 4.7 LBS / 2.1 KG
- 4 OUTPUT 1/2" SQ. DRIVE

REVISIONS											
REV.	DESCRIPTION	ECN	DATE	BY	APPRVD						
Α	PRODUCTION RELEASE		5-21-01	JFB	PP						

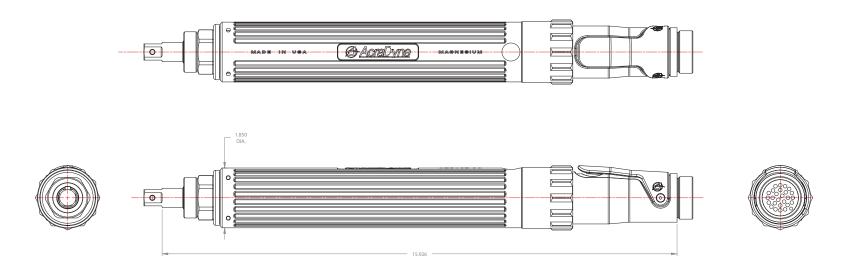

REMOVE BURRS AND SHARP EDGES .015R. MAX. MACHINE SURFACE FINISH: 125 RMS OR BETTER	DO NOT SO	ALF DRAWING	SCALE	1:1	SHEET OF 1	1	REVISION	Α
SURFACE ROUGHNESS PER ANSI Y14.36 TOLERANCES ON DECIMALS: X = ±030	PROJECT NO.	3000	SIZE	D PART NO. 21491		21491		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y145	APPROVED	PP	_ 3000	3000 SERIES 1/2 DR. INLINE				
CONTAINED THEREIN SHALL NOT BE DISCLOSED TO OTHERS. () IT WILL NOT BE REPRODUCED. D) IT WILL BE RETURNED ON DEMAND TO ACRADYNE INC.	CHECKED	KJD	- OU	TLINE - AE	M 3040			
THIS DRAWING EMBODIES CONFORMENTAL INFORMATION OF ACRADYNE INCORPORATED. IN THE ABSENCE OF EXPRESSED WRITTEN FRAMISSION, ACRADYNE HAS LOAMED THIS COPY WITH THE UNDERSTANDING THAIT. A) IT WOULD BE USED FOR ANY PURPOSE EXCEPTITHAT FOR WHICH IT WAS LOAMED, BI DATA	DRAWN	JFB 5-21-01	<u>AcraDyne</u>				CRADYNE INC. 1204 E. MAPLE MI. 48083 U.S.A.	