


NOTES:

- 1 FREE SPEED 450 RPM
- 2 MAX TORQUE 55 NM
- 3 WEIGHT 3.46 LBS / 1.5 KG
- 4 OUTPUT 3/8" SQ. DRIVE



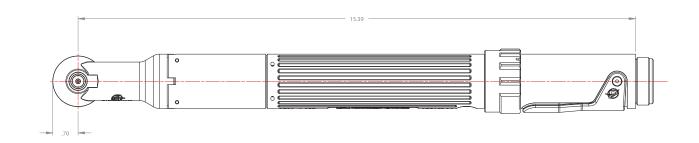

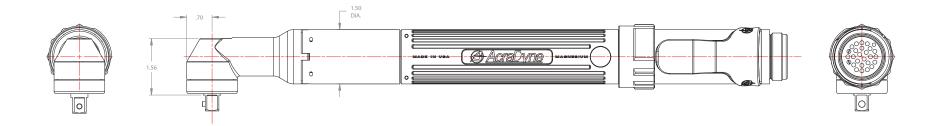

| REMOVE BURRS AND SHARP EDGES .015R. MAX. MACHINE SURFACE FINISH: 125 RMS OR BETTER | DO NOT SCALE DRAWING | | SCALE | 1:1 | SHEET OF 1 | 1 | REVISION | Δ | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------|-------|-------------------------------------|-------------|-------|---------------------------------------------------|---|--|
| SURFACE ROUGHNESS PER ANSI Y14.36 TOLERANCES ON DECIMALS: .X = ±0.30 | PROJECT NO. | 2000 | SIZE | D PART NO. 21501 | | 21501 | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y14.5 | APPROVED | PP | 2000 | 2000 TRIPLE STEP 3/8 DR. HIGH SPEED | | | | | |
| CONTAINED THEREIN SHALL NOT BE DISCLOSED TO OTHERS. C) IT WILL NOT BE REPRODUCED. D) IT WILL BE RETURNED ON DEMAND TO ACRADYNE INC. | CHECKED | KJD | OU | TLINE - AE | N 2055 | | | | |
| THIS DRAWING EMBODIES CONFIDENTIAL INFORMATION OF ACRADYINE INCORPORATED. IN THE ABSENCE OF EXPRESSED WRITTEN FERMISSION, ACRADYINE HAS LOANED THIS COPY WITH THE UNDERSTANDING THATE AIT INFOULD BE USED FOR ANY PURPOSE EXPERTITATE FOR WHICH IT WAS LOAMED BY DATA THE CONFIDENCE OF THE PROPERTY OF THE P | DRAWN | JFB 5-21-01 | | Acra Acra | <u>Dyne</u> | | CRADYNE INC. 1204 E. MAPLE MI. 48083 U.S.A. | | |