NOTES :


1 FREE SPEED - 700 RPM


2 MAX TORQUE - 38 NM

3 WEIGHT - 3.5 LBS. / 1.6 KG

4 OUTPUT - 3/8" SQ. DRIVE

	REVISIONS				
REV.	DESCRIPTION	ECN	DATE	BY	APPRVD
А	PRODUCTION RELEASE		5-23-01	JFB	PP



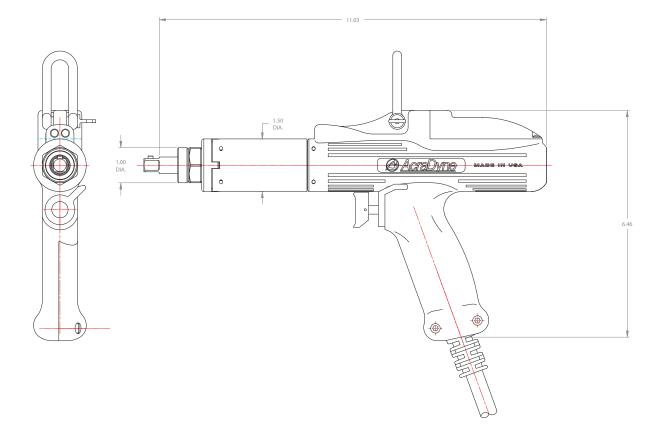

X = + 030 XXX = + 005	PROJECT NO.	2000		21510		21510		
SURFACE ROUGHNESS PER ANSI Y14.36 TOLERANCES ON DECIMALS:			SIZE	PART NO.		DRAWING N	0.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y14.5	APPROVED .	PP	2000	2000 SERIES TRIPLE STEP 3/8" DR.				
EXCEPT THAT FOR WHICH IT WAS CLAMEDS () DATA CONTAINED THERE IS INFLL OT BE DISCLOSED TO OTHERS. () IT WILL NOT BE REPRODUCED. () IT WILL BE RETURNED ON DEMAND TO ACRADYNE INC.	CHECKED .	KJD	- 001	LINE - AE	M 2038			
OF ACRADYME INCORPORATED. IN THE ABSENCE OF EXPRESSED WRITEN FRAMISSION, ACMODYME HAS LOANED THIS COPY WITH THE UNDERSTANDING THATE, AJ IT WOULD BE USED FOR ANY PURPOSE EXPERITING THE WING LOANED. BI DATA	DRAWN .	JFB 5-23-01	<u> AcraDyne</u>		1	RADYNE INC. 204 E. MAPLE MI. 48083 U.S.A.		